

Quick Catcher/ Quick Catcher 3-Piece Set

Insert/withdraw with just one hand


Pinch sleeve up to withdraw.

Insert, and automatically locks



No. QB-10

- Bit can be replaced with just one hand.
- Smooth surface finish and pull-up type sleeve prevent tools from dropping.
- Strong ball chuck enables to mount a tool up to 500g.
- Flat ring with large diameter is easy to mount on carabiners, etc.

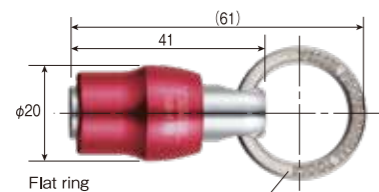

Model No.	Contents	Card size (mm)	EDP No.
QB-10R	Quick Catcher (Red)	1pc. 135×50×22	486921
QB-10B	Quick Catcher (Blue)	1pc. 135×50×22	486922
QB-10Y	Quick Catcher (Yellow)	1pc. 135×50×22	486923

Inner Ctn.: 10 sets Outer Ctn.: 10 sets

No. QB-K3C



- Provided with a carabiner to hang onto your belt, etc.

Model No.	Contents	Card size (mm)	EDP No.
QB-K3C	Quick catcher (Red-Blue-Yellow), Carabiner (Black) 1 for each	135×50×50	486924


Inner Ctn.: 10 sets Outer Ctn.: 100 sets

Drop-ceiling Socket



No. KA

- Super long size socket with a deep hole.
- The diameter of the deep hole part is designed to be as small as the size of the thread, realizing light weight and making overhead position work easier.
- Plane contact type dodecagonal socket.

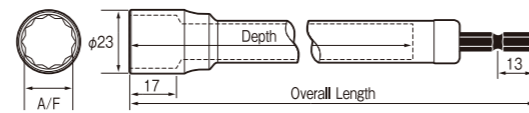

Model No.	A/F	Outer Diameter φ	Depth	Overall Length (mm)	Card size (mm)	EDP No.
KA201730	17	23	255	300	355×35	484421
KA201750	17	23	455	500	555×35	484422
KA201770	17	23	655	700	755×35	484423


Inner Ctn.: 5 sets

Fully Threaded Socket

No. A20ZW



- 3 rollers hold screw firmly.
- Indispensable for a work with hanging bolts and light gauge steel framing construction.

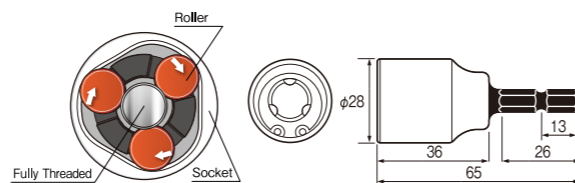

Model No.	Screw size	Outer Diameter φ	Overall Length (mm)	Card size (mm)	EDP No.
A20ZW30	w3/8	28	66	124×38×28	486359
A20ZW40	w1/2	28	66	124×38×28	486360

Inner Ctn.: 5 sets Outer Ctn.: 100 sets

⚠ Cautions

- Read attentively the instruction manual of the power tool.
- Wear protective goggles during use.
- Make sure to shut off the power source when attaching or replace the products.
- Do not use the product if cracks, chips, wear, deformation, and other anomalies, were found.
- Never perform no-load running of the power tool with this product attached.
- Do not use this product with something in which electricity flows.
- Do not remodel the product.

VESSEL Co., Inc.

17-25, Fukae-Kita 2-chome, Higashinari-ku, Osaka 537-0001 JAPAN
Tel: +81 (0)6 6976 7778 Fax: +81 (0)6 6972 9441
E-mail: export@vessel.co.jp URL: www.vessel.co.jp/english/

VESSEL EUROPE

contact@vessel-europe.com
www.vessel-europe.com

VESSEL TOOLS USA, INC.

1012 Brioso Drive, Suite 107, Costa Mesa, CA 92627 U.S.A.
Tel: +1 714 902 2112 Fax: +1 714 908 8111
E-mail: kkimura@vessel.co.jp / y-nakajima@vessel.co.jp
URL: www.vesseltoolsusa.com

Distributed by

20060000.00

●Specifications, size, and so on, may be subject to change without prior notice.

New

CHO- GO-TAN
超剛鍛

Use with **40V** (also 18V) power tools

Mirror Socket/ Mirror Socket Adapter/ Tilt Mirror Socket Adapter

No. MTA20/MTA20BSQ/MTA20WSQ

Patented


Durability
5 times longer
Compared with our standard model

*2.5 times longer for the A/F 8 and 10 types.

Torsion effect and shock absorption material prevent shank breakage.




Mirror Socket

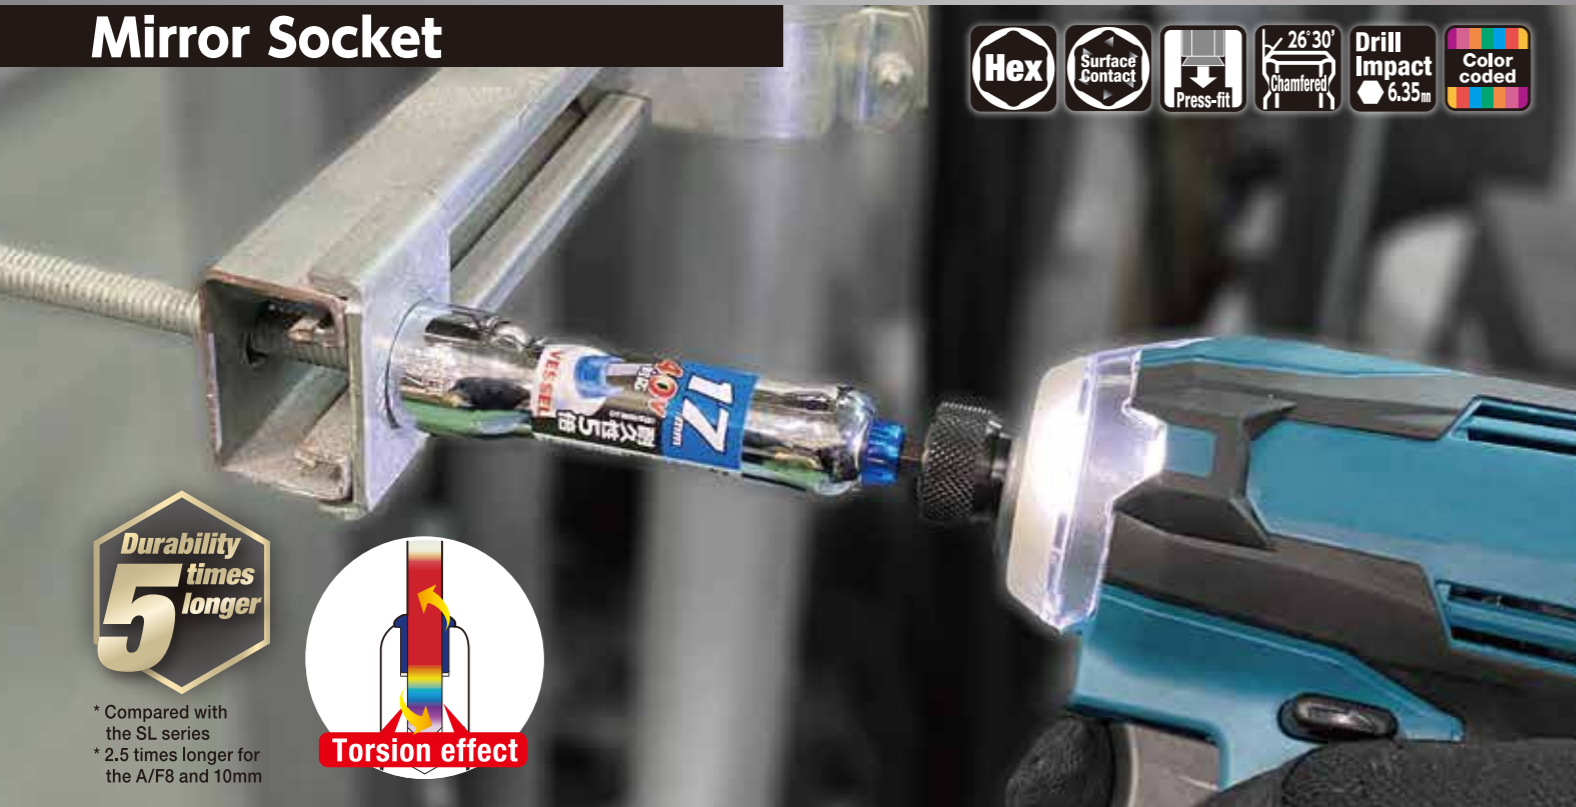

5
Durability
times
longer

* Compared with the SL series
* 2.5 times longer for the A/F8 and 10mm



Torsion effect

No.MTA20

Mirror Socket Adapter



5
Durability
times
longer

* Compared with our socket adapter series.

No.MTA20BSQ

Tilt Mirror Socket Adapter



5
Durability
times
longer

* Compared with our socket adapter series.

No.MTA20WSQ

Point 01

*Except A/F 8 and 10


Shock absorption material eases stress concentration on the shank at the time of hammering movement of the power tool.

Point 02

Torsion effect reduces the shank breakage.

Point 03

Hexagonal hole socket has many contact areas, and thus, can be used with a bolt or nut, whose edges are stripping.

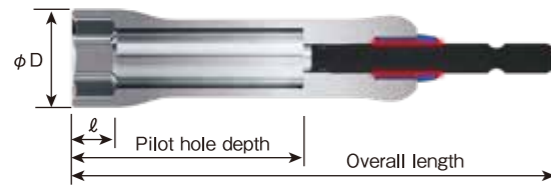

Model No.	A/F	φD (mm)	ℓ (mm)	Pilot hole depth (mm)	OAL (mm)	Size with hanger (mm)	EDP No.
MTA200811	8	14	6.5	55	115	170×35	485061
MTA201011	10	16	6.5	55	115	170×35	485062
MTA201211	12	18	7.5	55	115	170×35	485063
MTA201311	13	19	8	55	115	170×35	485064
MTA201411	14	20	8	55	115	170×35	485065

Model No.	A/F	φD (mm)	ℓ (mm)	Pilot hole depth (mm)	OAL (mm)	Size with hanger (mm)	EDP No.
MTA201711	17	23	9	55	115	170×35	485066
MTA201911	19	25	10	55	115	170×35	485067
MTA202111	21	28	11	55	115	170×35	485068
MTA202211	22	29	13	55	115	170×35	485069
MTA202411	24	32	13	55	115	170×35	485070

*The colors of the A/F column in the table indicate the color of the sticker and the resin part.

Inner carton: 5pcs, Outer carton: 100pcs

Point 01

Shock absorption material eases stress concentration on the shank at the time of hammering movement of the power tool.

Point 02

Optimal for the applications that require the quick fastening work: easy replacement of sockets.

Point 03

Economical: sockets for manual wrenches can be attached.

Point 01

Shock absorption material eases stress concentration on the shank at the time of hammering movement of the power tool.

Point 02

2-way use: Pull the socket to tilt (max. 15°), push to fix.

Point 03

Economical: sockets for manual wrenches can be attached.



Model No.	Square drive size SQ	φD	OAL (mm)	Size with hanger (mm)	EDP No.
MTA20BSQ3	9.5	16	77	135×35	485071
MTA20BSQ4	12.7	18	82	140×35	485072
MTA20BSQ3L	9.5	16	110	165×35	485073
MTA20BSQ4L	12.7	18	115	170×35	485074

Inner carton: 5pcs, Outer carton: 100pcs



Model No.	Square drive size SQ	φD	OAL (mm)	Size with hanger (mm)	EDP No.
MTA20WSQ3	9.5	16	77	135×35	485075
MTA20WSQ4	12.7	18	82	140×35	485076
MTA20WSQ3L	9.5	16	110	165×35	485077
MTA20WSQ4L	12.7	18	115	170×35	485078

Inner carton: 5pcs, Outer carton: 100pcs