

# Driver, Bit and Screw Cross-Reference



JIS B 1101 JIS B 1135		JIS B 1111 JIS B 1122 JIS B 1112 JIS B 1124 JCIS 10-70		JIS B 1176 JIS B 1177		JIS B 1180 JIS B 1128 JIS B 1123		JIS B 1107 JIS B 1128 JIS B 1136 JASO F116-89											
■ Slotted (Reference)		■ Phillips ■ Pozidriv ■ Supadriv		■ Hex ■ Ball point		■ Socket		■ TORX (Reference)											
		Small Screw	Wood screw	Small Screw	Tapping screw	Wood screw	Drill screw	Small Screw	Tapping screw	Wood screw	Drill screw	Small Screw	Tapping screw	Wood screw	Drill screw	Small Screw	Tapping screw	Wood screw	Drill screw
ø 1.8	1 (※) 1.2 (※)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.6 1.8
ø 2.5	1.6	1.6	1.6 1.8	1.4	1.6	1.7	2.2(ST)	1.8	—	H1.5	1.6 2	2	2	—	* T1	0.84	1	1	—
ø 3	2	1.8	2.1	2	2.3	2.6	—	—	—	H2	2.5	4	2.5	2.9	* T2	0.94	1.2	1.2	—
ø 4	2.2 (※) 2.5	2.4	—	—	—	—	—	—	—	H2.5	3	5	3	3.5	* T3	1.12	1.4	1.4	—
ø 4.5	2.5 (※) 3	2.7	—	—	—	—	—	—	—	H3	4	6	4	4.2	* T4	1.3	1.6	1.6 1.7	—
ø 5	3 (3.5)	3.1	3.5	2	(2.2) (2.3)	2.5	2.9(ST)	2.1	2.4	2.1	5	8	5	5.5	* T5	1.37	2	2	2
ø 5.5	(3.5)	3.5	3.8	—	—	—	—	—	—	H4	6	10	6	6.3	* T6	1.65	2	2	2
ø 6	(3.5) 4	3.8	4.1	3	(3.5) 4	3.5	3.5(ST)	3.1	3.5	H5	8	12	7	7 (※)	* T7	1.97	—	—	—
ø 7	4	4.5	4.8	4	(4.5) 5	4.5	4.2(ST)	4.1	4.2(ST)	H6	10	16	8	8	* T8	2.3	2.5	2.5	2.5
ø 8	4.5 (※) 5	5.1	5.5	6	8	5.5(ST) 6.3(ST)	5.1	5.5	6	H8	12	20	10	10 (※)	* T9	2.48	—	—	4.5
ø 9	6	5.8	6.2	6.8	—	—	—	—	—	H10	12	16	12	12 (※)	* T10	2.72	3	2.9 3	3.5
ø 10	6	7.5	8	—	—	—	—	—	—	H12	14	24	14	14 (※)	* T11	3.26	(3.5)	3.5	—
	8 (※)	—	—	10	12	8(ST) 9.5(ST)	7.5	8	9.5	H14	14 (※)	20	14	14 (※)	* T12	3.84	4	4	4
	—	—	—	No.0	No.0	1.4	1.6	1.7	2.2(ST)	H15	16	22	16	16 (※)	* T13	4.4	5	4.2	4.5
	—	—	—	No.1	No.1	2	(2.2) (2.3)	2.5	2.9(ST)	H16	16	20	16	16 (※)	* T14	4.96	—	4.5	5.5
	—	—	—	No.2	No.2	3	(3.5) 4	4	4.2(ST)	H17	16	24	16	16 (※)	* T15	5.49	6	6	6.3
	—	—	—	No.3	No.3	6	8	5.5(ST) 6.3(ST)	6.8	H18	18	24	18	18 (※)	* T16	6.6	8	8	8
	—	—	—	No.4	No.4	10	12	8(ST) 9.5(ST)	7.5	H19	18	24	18	18 (※)	* T17	7.77	8	—	8
	—	—	—	—	—	—	—	—	—	H20	20	24	20	20 (※)	* T18	8.79	10	10	10

(\*) Marked figures are in accordance with old JIS standards. (\*\*) Refer to No. 1 for Truss screws. (ST) marked figures are in accordance with JIS standards. W: Refer to the old JIS standards for Whitworth screws.

Industrial Bits

# BITS & SOCKETS



# Contents

Type A Industrial Bits .....	61 - 68
Type B Industrial Bits.....	69 - 78
Precision Bits .....	79 - 85
Bit Holders, etc.....	86 - 91

## About ISO

### ISO 9001 : 2008



Our screwdriver manufacturing division, VESSEL SHIMANE CO., LTD is certified according to ISO standard, the global standard for quality assurance control.

### ISO 14001 : 2004



We obtained ISO 14001 in August 2010. VESSEL will further strive to offer eco-friendly products, aiming at minimizing the environmental burden as a manufacturing group.

# Industrial bits Technical

# BITS & SOCKETS

# TECHNICAL

RoHS

## Environmental measures

Pb (lead) / Cd (cadmium) / Hg (mercury) / Hexavalent chromium / PBB (polybrominated biphenyl) / PBDE (polybrominated diphenyl ether) / DEHP, BBP, DBP, DIBP (phthalate esters)


The products with this mark in this catalogue are compliant with the RoHS directives (EU) (usage limit of the above 10 substances).

Note: For the updated information on RoHS compliant products, visit our homepage, because some products or sizes are under investigation or are not compliant at the time of publication of this catalogue.




### For cross recessed screws

Most commonly used in the market  
JIS B4633.  
Devised by PHILLIPS SCREW COMPANY.



### For slotted head screws

Especially used for small screws for watches, glasses and precision equipment.  
Also used for cross recessed slotted screws  
JIS B4609.



### For square screws

Mainly used for quake-resistant hardware.  
Also good for sash doors and log houses.



### For hexagonal socket screws

Used for metal products assembly, mold tools, machines, precision equipment and motorcycles, etc.



### For TORX screws

Used for hard disk, automobiles and cutting tools.  
VESSEL manufactures tools for TORX and TORX PLUS under the licensing agreement with Acument Intellectual Properties, LLC.



### For POZIDRIV screws

Favored in Europe and used for OA devices, computers, housing materials, automobiles and airplanes.  
VESSEL manufactures POZIDRIV tools under the licensing agreement with European Ind. Serv. Ltd. in UK.




### For SUPADRIV screws

Favored in UK, Where this shape was devised, and used for OA devices, computers, housing materials, automobiles and airplanes. VESSEL manufactures SUPADRIV tools under the licensing agreement with European Ind. Serv. Ltd. in UK.




### Torsion part

Torsion part absorbs the impact caused when the screw head is fully seated by an impact driver, preventing tip breakage.

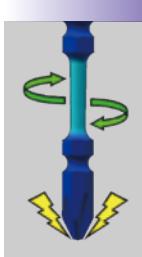



$\phi 3.5 \times 20\text{mm}$

For soft joint such as wood screws fastening.  
Suitable when fastened material is soft.



$\phi 3.7 \times 14\text{mm}$

For hard joint such as drill fastening.  
Suitable when fastened material is hard.

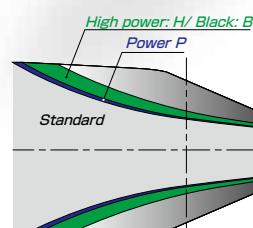

Name	Mark	Cross-section area of the tip	Purpose	Fitting to screws
Standard	—	Small	Wide range of works	Strongly Recommended
Power	P	Medium	For high impact	Very Good
High Power	H	Large	For widely cross recessed screws (pan head screws.)	Good
Black	B			



## Sockets with a press-fitted shank

The socket and the shank are separately heat-treated at different harnesses, realizing a high torsional strength nearly two times greater than that of integrated type sockets.



## Carefully selected materials

With our long experience and research in manufacturing, we developed our own materials with balanced hardness (less wearing) and toughness (hard to chip).

Properties of the elements contained in the materials are improved to an optimal level through a heat treatment process.

**C** ...Carbon

The more carbon is contained, the greater hardening penetration becomes. When the carbon content is 0.6 % or more, abrasion resistance increases, although hardening penetration remains the same.

**Ni** ...Nickel

The addition of small amount of nickel increases steel's shock resistance and toughness. When added in a large amount, it becomes weak and breaks easily.

**Cr** ...Chrome

Hardenability increases. Oxidation resistance increases. Toughness is improved.

**Mo** ...Molybdenum

Hardenability increases. Significant decrease in toughness can be prevented.

## Insertion part

For compact electric screw drivers



φ 4 mm

82P



φ 4 mm

81P  
83P



φ 5 mm

84P

For electric or air screwdrivers



H 5 mm

71P  
85P



H 5 mm

71P

For air or electric impact screwdrivers



H 6.35 mm

65P  
~68P  
86P



H 6.35 mm

63P  
~65P



H 6.35 mm

73P  
~78P  
86P  
~88P



H 6.35 mm

72P  
73P

For air impact drivers



H 8 mm

68P



H 8 mm

68P

## Hardness (Heat processing classifications)

Chip, wearing and deformation, which directly affect the life of bits and sockets, can be controlled by choosing different hardnesses (heat processing classification)

Hardness (Heat processing classification)	Examples of use for screws	Industrial use
X Possible highest hardness	Precision small screws, automated machine fitting, collated screws	Precision device assembly, light electrical automated screw tightening, collated screws for housing
H High hardness	Wood screws, small screws, tapping screws, self-drilling screws	Light electric assembly, communication acoustic device assembly, civil engineering and construction work
G Standard hardness	Tapping screws, small screws	Automobile and machine assembly, sash frame assembly
E Low hardness S	Self-drilling screws, tapping screws, small screws	Rigid joint, sheet metal assembly, heavy work

High hardness



Low hardness

Chip



Wearing



Distortion






# Double End Bit Type A



The Type A entry is designed to VESSEL's special insertion dimensions, developed when we first started manufacturing air drivers. The majority of electric drivers on the market can be used with our ubiquitous Type A bits.

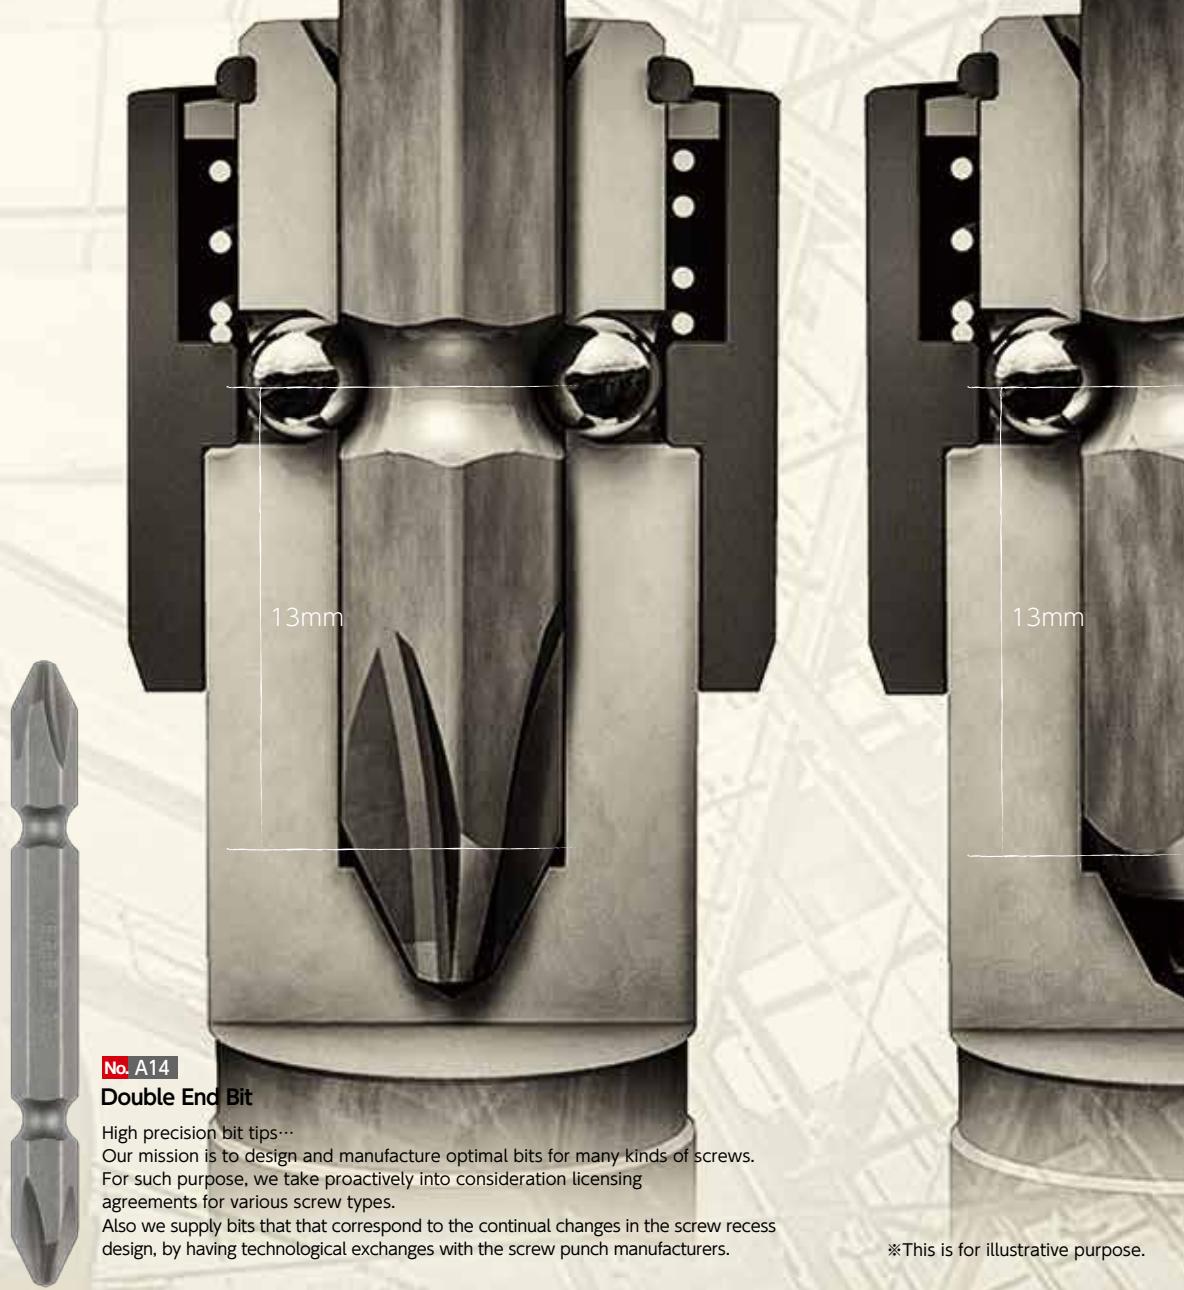

\*This is for illustrative purpose.

## Applicable models

Please check the model No. of your drivers before determining which bit(s) to choose.

Shape	Model No.	Page	Applicable models	
			 Air Screwdriver	 Electric Screwdriver
 H 6.35 mm	A14	63P 64P  63P  64P  65P  65P  66P  66P  67P  67P  68P  86P  87P	<b>VESSEL</b> GT-H4R-H4PR-H4.5-H5R-H5P-PH4-PH5-S4.5DR-PLR-PLZ-PLP-PLHII-S6MLR-S6HS-S6.5D-P4.5D-P4.5DR-P5LS-P6EXD-P6LSIII-P6HS-P6.5D-S4TR-S4TS-S4TG-SSTR-SSTB-S5TG-S5TS-S4.5XD-P4.5XD-PLXD-P60XD-P6LXD-S6LXD-S60XD-PLIXD-P5XD  <b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	<b>VESSEL</b> VE-5000-5000P-6000-6000P  <b>Toshiba</b> CI-144VBKS  <b>Hitachi Koki</b> WH 7DL-9DM2-10DL-10DAL-14DSL2-14DBAL2-14DDL-14DBL-18DBAL2-18DDL-18DBL-14DBEL-18DBEL-14DKL-18DKL-10DCL-14DCL-12H2-12AB2-12VE WM 10DBL-14DBL-18DBL WP 14DSL-12VA DB 3DL2 FWH 7DL-10DAL-10DFL-14DGL-14DSAL-12DC2-12VD-10DCL FDB 3DL2-10DFL <b>W 4SA2-5SA-8V</b>  (Old model) WH 6DC-9DM-12DM-12DAF2-12DM2-12DMR-12DK-12DMR2-14DMRL-14DBL-14DBAL-18DBDL-8DYA (No.2 only available)-14DH-14DM-14DML-14DMR-14DSL-18DL-12VA-12VB-12VC3-12VC2-12VC-12VD WP 10A-12DM <b>W 4SA-5VC-5VD-5VE-6VC-6VH-6VJ-6M-6MV-6MV2</b>  ● The models in blue letters are the screwdrivers for light steel substrates and boards. It is recommended to use a 45mm long bit.
	M-A14		<b>Hitachi Koki</b> WH 7DL-9DM2-10DL-10DAL-14DSL2-14DBAL2-14DDL-14DBL-18DBAL2-18DDL-18DBL-14DBEL-18DBEL-14DKL-18DKL-10DCL-14DCL-12H2-12AB2-12VE WM 10DBL-14DBL-18DBL WP 14DSL-12VA DB 3DL2 FWH 7DL-10DAL-10DFL-14DGL-14DSAL-12DC2-12VD-10DCL FDB 3DL2-10DFL <b>W 4SA2-5SA-8V</b>  (Old model) WH 6DC-9DM-12DM-12DAF2-12DM2-12DMR-12DK-12DMR2-14DMRL-14DBL-14DBAL-18DBDL-8DYA (No.2 only available)-14DH-14DM-14DML-14DMR-14DSL-18DL-12VA-12VB-12VC3-12VC2-12VC-12VD WP 10A-12DM <b>W 4SA-5VC-5VD-5VE-6VC-6VH-6VJ-6M-6MV-6MV2</b>  ● The models in blue letters are the screwdrivers for light steel substrates and boards. It is recommended to use a 45mm long bit.	
	A14P		<b>Hitachi Koki</b> WH 7DL-9DM2-10DL-10DAL-14DSL2-14DBAL2-14DDL-14DBL-18DBAL2-18DDL-18DBL-14DBEL-18DBEL-14DKL-18DKL-10DCL-14DCL-12H2-12AB2-12VE WM 10DBL-14DBL-18DBL WP 14DSL-12VA DB 3DL2 FWH 7DL-10DAL-10DFL-14DGL-14DSAL-12DC2-12VD-10DCL FDB 3DL2-10DFL <b>W 4SA2-5SA-8V</b>  (Old model) WH 6DC-9DM-12DM-12DAF2-12DM2-12DMR-12DK-12DMR2-14DMRL-14DBL-14DBAL-18DBDL-8DYA (No.2 only available)-14DH-14DM-14DML-14DMR-14DSL-18DL-12VA-12VB-12VC3-12VC2-12VC-12VD WP 10A-12DM <b>W 4SA-5VC-5VD-5VE-6VC-6VH-6VJ-6M-6MV-6MV2</b>  ● The models in blue letters are the screwdrivers for light steel substrates and boards. It is recommended to use a 45mm long bit.	
	A14H		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	A14B		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	AZ14		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	AS14		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	A14R		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	AL14		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	AT14		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	AT14P		<b>Hitachi Koki</b> WH 12AB2-12H2  <b>NPK</b> ND-○○○Y NPW-○○○Y SD-4  <b>Fuji Kuki</b> FLT series D-10-D-20 FPT series D-10 FL series D-10 FPWV series D-10 FW series D-10-D-20-D-60-D-70-D-80  <b>Makita</b> AD604-AD605H  <b>Yokota</b> YLa60B-70B-80B YLT50B-60B-70B-60BL-70BL Y-40SB-41B-46B YX-80B-180B-180SB-280B-380B-500B-180SB-280SB-380SB-500SB YBX-50B YD-400SCB-4.5LBZ-6WBZK-600SBZ-40PBZ-4.5PBZK-600PBZ-650PBZ-65PTBZ-65PBZ-670B-670B-F-670B-R-670B-RF  <b>Yutani</b> D-6SPAL-5WPEA-6WSPEA-6WSHPEA-600SHEA-604A-8WPE-6SSAEL-6WSHSA DH-6PL-4.5PEA-6PLE-4.5SA-6SEL HPW-4D-6D-6xD-8xD-4SD-6SD-6αSD ETC-10HD-15HD-5HSD-10HSD  <b>MAX</b> AT-ID6P1-HF-ID7P1  <b>MA20</b> <b>MA20-5</b> <b>SB</b> <b>MA20</b> <b>MA20S</b> <b>HA</b> <b>HAM</b>  <b>HD-71</b> <b>x</b> <b>45</b>	
	A15		<b>Hitachi Koki</b> WH 14DA  <b>Panasonic</b> EZ 6220-6225-7410-7411	
	A19		<b>Hitachi Koki</b> WH 14DA  <b>Panasonic</b> EZ6680	
	V5			

**No. A14 Double End Bit**

- If one end breaks, the other end can be used.
- A wide variety of bits according to different heat treatment.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1× 45	H	10	100	413029
65	H	10	100	413031
65	G	10	100	413032
110	H	10	100	413231
110	G	10	100	413232
⊕ 2× 45	X	10	100	413039
45	H	10	100	413041
45	G	10	100	413040
65	X	10	100	413047
65	H	10	100	413042
65	G	10	100	413043
65	E	10	100	413045
110	X	10	100	413262
110	H	10	100	413241
110	G	10	100	413242
110	E	10	100	413243
150	X	10	100	413263
150	H	10	100	413245
150	G	10	100	413246
150	E	10	100	413247
200	X	10	150	413264
200	H	10	150	413249
200	G	10	150	413248
200	F	10	150	413250
300	G	10	100	413255
⊕ 3× 45	H	10	100	413051
45	E	10	100	413050
65	X	10	100	413054
65	H	10	100	413052
65	E	10	100	413053
110	H	10	100	413252
110	E	10	100	413251

**No. A14P Double End Bit(Power tip)**

- If one end breaks, the other end can be used.
- Well balanced combination between tip precision and strength.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 65	H	10	100	415331
110	H	10	100	415333
150	H	10	100	415334

**No. A14H TAPPING Bit(High power tip)**

- If one end breaks, the other end can be used.
- Reinforced tip for tapping work.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 65	H	10	100	413351
110	H	10	100	413355
150	H	10	100	413359

**No. M-A14 Double End Bit (Magnetized)**

- If one end breaks, the other end can be used.
- Strongly magnetized.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1× 45	H	10	100	413401
65	H	10	100	413402
110	H	10	100	413407
⊕ 2× 45	H	10	100	413403
45	G	10	100	413404
65	H	10	100	413405
65	G	10	100	413406
110	H	10	100	413408
110	G	10	100	413411
150	H	10	100	413409

**No. A14B TAPPING Bit(Black tip)**

- If one end breaks, the other end can be used.
- Reinforced tip for tapping work.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 50	S	10	100	413141
75	S	10	100	413142
100	S	10	100	413341
150	S	10	100	413342

**No. AZ14 GIZA Bit**

PAT.

- If one end breaks, the other end can be used.
- Jagged tip prevents cam-out.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 65	H	10	100	413360
110	H	10	100	413361

**No. AS14 SLENDER Bit**

- If one end breaks, the other end can be used.
- Tapered tip allows for easy view.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1× 65	H	10	100	413367
⊕ 2× 45	H	10	100	413366
65	H	10	100	413364
110	H	10	100	413365



**No. A14 Square Double End Bit**

- If one end breaks, the other end can be used.
- Specially-shaped tip prevents the bit from getting stuck.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
SQ 1× 65	H	10	100	413380
SQ 2× 65	H	10	100	413381
110	H	10	100	413383
* 150	H	10	100	413385
SQ 3× 65	H	10	100	413382
110	H	10	100	413384
150	H	10	100	413386

**No. A14R Square Double End Bit**

- If one end breaks, the other end can be used.
- With a ring attached preventing the bit from getting stuck.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
* SQ 1× 65	H	10	100	413387
* SQ 2× 65	H	10	100	413388
* 110	H	10	100	413389
* 150	H	10	100	413390
SQ 3× 65	H	10	100	413391
* 110	H	10	100	413392
* 150	H	10	100	413393

**No. A14 SUPADRIV Bit**

- SUPADRIV systems are patented and registered as the trademark of EIS corp. in U.K.
- VESSEL has a manufacturing license in Japan and selling same to the world.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
SDV1× 65	H	10	100	636101
SDV2× 45	H	10	100	636105
65	H	10	100	636106
SDV3× 65	H	10	100	636111

**No. AL14 ALFA Bit**



- If one end breaks, the other end can be used.
- Modest torsion effect created by tempering treatment on the ball grooves.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
+ 2× 65	H	10	100	413369
110	H	10	100	413370


**One point****Bit selection I**

- Selecting Phillips tip suitable for screw head hole

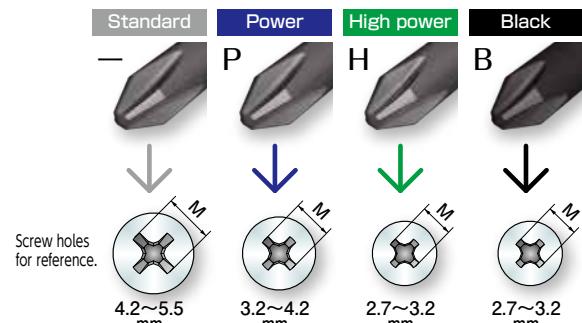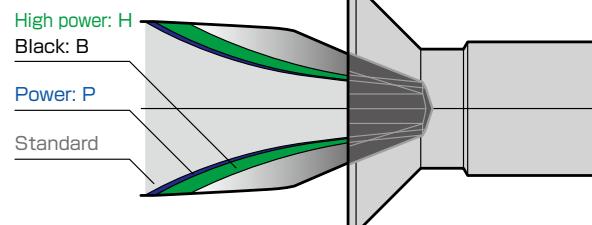


\* M dimension : the size of a cross recess on a screw head viewed from directly above

- Selecting Phillips tip according to hardness classification

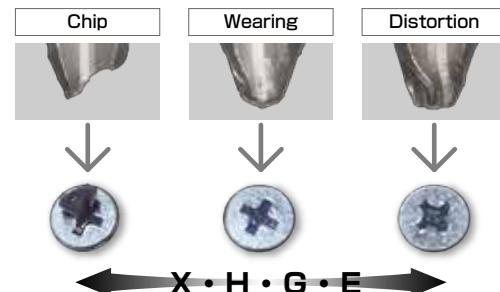

**No. AT14 TORSION Bit**

- If one end breaks, the other end can be used.
- For soft joint such as wood screws.

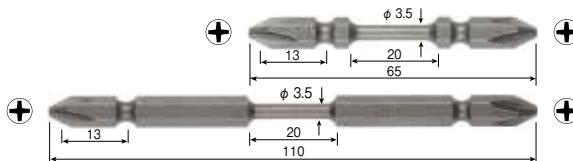

Size TipxφxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2x3.5x 65 110	H	10	100	413143
	H	10	100	413144

**No. A16 Recessed Bit**


- Recessed type. Thin shank allows for use in narrow spaces.



Size TipxφxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1x3 × 65	H	10	100	415061
⊕ 2x4.5 × 65	H	10	100	415066

**No. AT14P TORSION Bit(Power tip)**

- If one end breaks, the other end can be used.
- For hard joint such as drill screws.

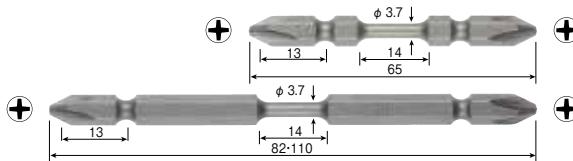


Size TipxφxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2x3.7x 65 82	X	10	100	415361
	X	10	100	415362
110	X	10	100	415363

**No. ST14 SLENDER TORSION Bit**

PAT.

- If one end breaks, the other end can be used.

• Thin tip allows for easy view. For soft joint such as wood screws.

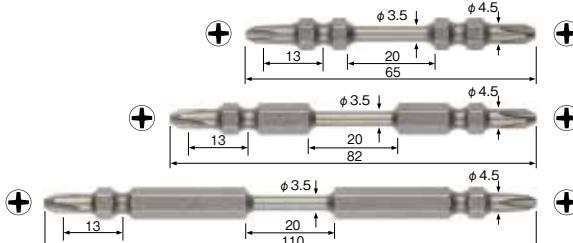

Size TipxφxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1x3.5x 65	H	10	100	413374
⊕ 2x3.5x 65 82	H	10	100	413375
	H	10	100	413377
110	H	10	100	413376

# One point

**Bit selection II**

- Selection according to bit shapes

**Double End Bit**

If one end breaks, the other end can be used.

**Recessed Bit / Bit**

Thin shank improves workability in narrow spaces.

- Selection according to torsion effect




**AL14**  
Ball groove  
Ball groove

Impact is absorbed by the torsion effect at the slot part which receives tempering treatment.



**AT14/ST14**  
Φ3.5  
20mm

Impact is absorbed by the torsion part (Φ3.5 × 20mm).



**AT14P**  
Φ3.7  
14mm

Impact is absorbed by the torsion part (Φ3.7 × 14mm).

**Hard Joint****Soft Joint****Hard Joint****Hard Joint**


When an instantaneous impact is given when the head of drill screw and tapping screw is fully seated

**Soft Joint**

When load is gradually increased such as in fastening wood screws

**No. M-A16 Recessed Bit (Magnetized)**

- Recessed type. Thin shank allows for use in narrow spaces.
- Powerfully magnetized.

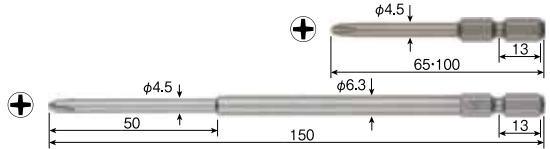

Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2x4.5x 65	H	10	100	415311
100	H	10	100	415312
150	H	10	100	415313

**No. A16 Hex Bit**


- For assembly work focusing on workability.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
H 2x 65	H	10	100	481090
110	H	10	100	481100
2.5x 65	H	10	100	481091
110	H	10	100	481101
3x 65	H	10	100	481092
110	H	10	100	481102
4x 65	H	10	100	481093
110	H	10	100	481103
5x 65	G	10	100	481094
110	G	10	100	481104
6x 65	G	10	100	481096
110	G	10	100	481105

**No. A16 Recessed Bit**


- For assembly work focusing on workability.

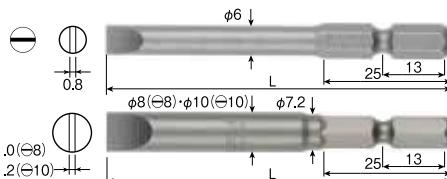

Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 6 x 45	G	10	100	415071
70	G	10	100	415072
⊕ 8 x 45	G	10	300	415171
70	G	10	250	415172
⊕ 10x 52	G	10	200	415271
70	G	10	200	415272

**No. A16 Square Bit**

- For assembly work focusing on workability.

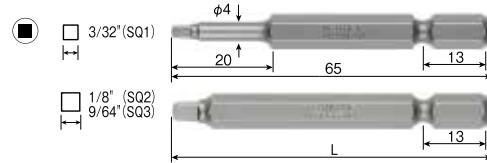

Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ SQ 1x4x 65	H	10	100	481001
SQ 2x 65	H	10	100	481002
110	H	10	100	481005
150	H	10	100	481008
⊕ SQ 3x 65	H	10	100	481003
110	H	10	100	481006
150	H	10	100	481009

**No. D81 Recessed Bit**


- Recessed type. Thin shank allows for use in narrow spaces.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2 x 82	X	10	100	482040
82	H	10	100	482041
82	E	10	100	482042

**No. V TORX Bit**

- For TORX screws used in the automotive industry.



Size Tip×Overall Length (mm)	mm	d1	L1	d2	(mm)	Inner Ctn.	EDP No.
T6 x 65	1.65	1.95	6.5	4.0	—	10	634997
110	1.65	1.95	6.5	4.0	—	10	634998
T8 x 65	2.3	2.60	7.0	4.5	—	10	634999
110	2.3	2.60	7.0	4.5	—	10	635000
T10x 65	2.72	3.02	7.5	4.5	—	10	635120
110	2.72	3.02	7.5	4.5	—	10	635121
T15x 65	3.26	3.56	7.5	4.5	—	10	635125
110	3.26	3.56	7.5	4.5	—	10	635126
T20x 65	3.84	4.14	7.5	5.0	—	10	635130
110	3.84	4.14	7.5	5.0	—	10	635131
T25x 65	4.4	4.70	8.0	5.0	—	10	635135
110	4.4	4.70	8.0	5.0	—	10	635136
T27x 65	4.96	5.26	8.0	5.5	—	10	635140
110	4.96	5.26	8.0	5.5	—	10	635141
T30x 65	5.49	5.79	8.5	6.0	—	10	635145
110	5.49	5.79	8.5	6.0	—	10	635146
T40x 65	6.6	H6.35	—	H6.35	—	10	635150
110	6.6	H6.35	—	H6.35	—	10	635151


TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.



H 6.35 mm

**No. V TORX Bit (Tamper-Proof)**

- For TORX screws used in the automotive industry.
- With a round hole for tamper-proof.




Size TipxOverall Length (mm)	mm	d1	L1	d2 (mm)	Inner Ctn.	EDP No.
<b>T8H × 65</b>	2.3	2.60	7.0	4.5	10	635032
110	2.3	2.60	7.0	4.5	10	635033
<b>T10HX × 65</b>	2.72	3.02	7.5	4.5	10	635001
110	2.72	3.02	7.5	4.5	10	635002
<b>T15HX × 65</b>	3.26	3.56	7.5	4.5	10	635005
110	3.26	3.56	7.5	4.5	10	635006
<b>T20HX × 65</b>	3.84	4.14	7.5	5.0	10	635010
110	3.84	4.14	7.5	5.0	10	635011
<b>T25HX × 65</b>	4.4	4.70	8.0	5.0	10	635015
110	4.4	4.70	8.0	5.0	10	635016
<b>T27HX × 65</b>	4.96	5.26	8.0	5.5	10	635020
110	4.96	5.26	8.0	5.5	10	635021
<b>T30HX × 65</b>	5.49	5.79	8.5	6.0	10	635025
110	5.49	5.79	8.5	6.0	10	635026
<b>T40HX × 65</b>	6.6	H6.35	—	H6.35	10	635030
110	6.6	H6.35	—	H6.35	10	635031

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. A20 Socket Bit**

- Socket bit for assembly.
- Strong resistance to shank breakage with press-fit method.  
(Marked with a star symbol in the table below)

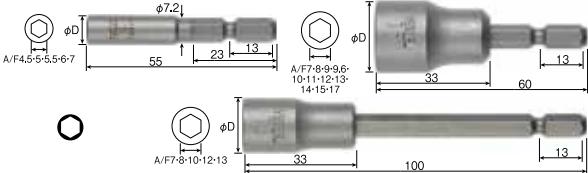

Size TipxOverall Length (mm)	φD	Hole depth (mm)	Inner Ctn.	Outer Ctn.	EDP No.
<b>A/F 4.5× 55</b>	7.5	20	10	250	416080
5 × 55	8.5	20	10	250	416081
<b>5.5× 55</b>	9	20	10	250	416082
100	9	25	10	250	416281
<b>6 × 55</b>	10	20	10	200	416083
100	10	25	10	200	416282
<b>7 × 11× 55</b>	11	20	10	200	416084
100	11	25	10	150	416280
<b>7 × 60</b> ☆	13.5	22	10	200	416095
100	13.5	25	10	150	416283
<b>8 × 60</b> ☆	13.5	22	10	200	416085
100	13.5	22	10	150	416284
<b>9 × 60</b> ☆	15	22	10	150	416086
<b>9.6× 60</b> ☆	15	22	10	150	416087
<b>10 × 60</b> ☆	16	22	10	150	416088
100	16	22	10	100	416286
<b>11 × 60</b> ☆	17	22	10	150	416089
<b>12 × 60</b> ☆	18	22	10	100	416090
100	18	22	10	100	416287
<b>13 × 60</b> ☆	19	22	10	100	416091
100	19	22	10	50	416288
<b>14 × 60</b> ☆	20	22	10	100	416092
<b>15 × 60</b> ☆	21	22	10	50	416093
<b>17 × 60</b> ☆	23	22	10	50	416094

☆...Press-fit type

**No. A20-5 Socket Bit**


- Short type socket bit to use in narrow spaces, such as on the periphery of automobile engines.



Size TipxOverall Length (mm)	φD	Drilling holes depth (mm)	Inner Ctn.	Outer Ctn.	EDP No.
<b>A/F 10× 50</b>	16	10	10	150	416396


**One point****Features of press-fit type sockets**

(Press-fit type: marked with a star symbol in the table of each model)

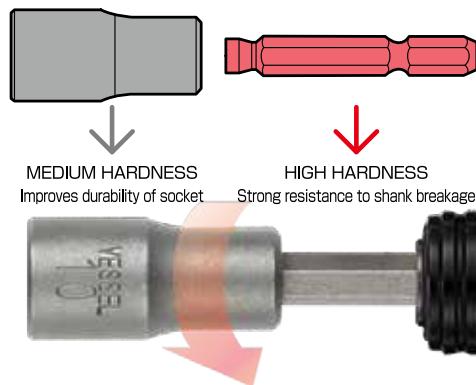


The shank and socket have been heat-treated to the best hardness and press-fit together.  
The socket part is strong against wear and shank against twisting, resulting in higher durability.

**Prevents shank breakage**  
Torsion moment with a static torque

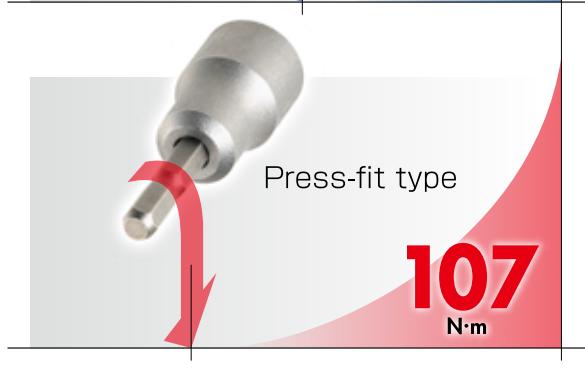

**No. SB Nut Setter (Ball Lock)**


- Socket bit for Hex screws.
- Ball-lock type for minimum cutting particles.

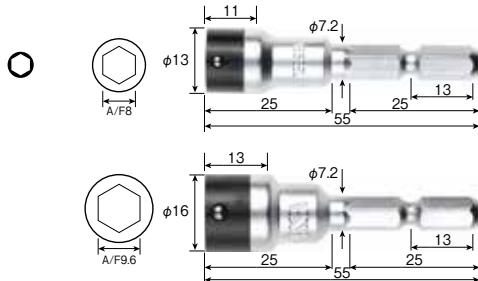

Size Tip×Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 5/16" (8mm) × 55 (For screw dia. 5mm)	5	50	482531
A/F 3/8" (9.6mm) × 55 (For screw dia. 6mm)	5	50	482532

**No. MA20 Socket Bit (Press-Fit Magnet)**

- Socket bit for Hex screws.
- Holds the screw with a strong magnet, to prevent the screws from dropping.

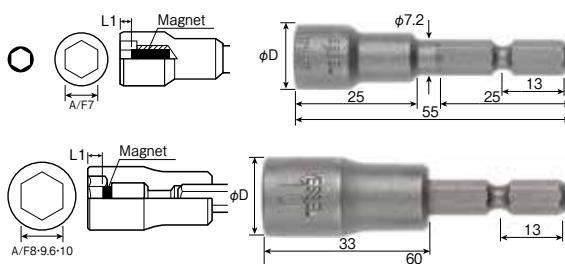


Size Tip×Overall Length (mm)	φD	L1 (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 7 × 55 (For screw dia. of 4mm)	13	2.5	10	200	482510
A/F 8 × 60 (For screw dia. of 5mm)	☆ 13.5	3.17	10	150	482511
A/F 9.6x 60 (For screw dia. of 6mm)	☆ 15	3.96	10	150	482512
A/F 10 × 60 (For screw dia. of 6mm)	☆ 16	3.96	10	150	482513

☆Press-fit type.

**No. MA20S Socket Bit (Side Magnet)**


- Socket bit for Hex screws.
- Holds the screw with side magnet, to prevent the screws from dropping.

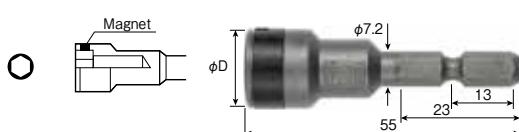

Size Tip×Overall Length (mm)	φD	Drilling holes depth (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 5/16"(8mm) × 55	13	20	10	100	482401
A/F 3/8"(9.6mm) × 55	16	20	10	100	482402
A/F 10mm × 55	16	20	10	100	482403

**No. A15 Double End Bit**

- If one end breaks, the other end can be used.
- High strength with 8mm hexagonal shank.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2x 65	G	10	250	414041
110	G	10	150	414042
⊕ 3x 65	E	10	250	414051
110	E	10	150	414052

**No. A19 Hex Bit**

- For assembly work focusing on workability.
- High strength with 8mm hexagonal shank.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
H 5x 65	G	10	250	481191
6x 65	G	10	250	481192
130	G	10	100	481196
8x 65	G	10	250	481193
130	G	10	100	481197
10x 65	S	10	200	481194
130	S	10	100	481198

**No. V5 TORX Bit**

- For TORX screws used in the automotive industry.
- High strength with 8mm hexagonal shank.



Size Tip×Overall Length (mm)	d1 (mm)	L1 (mm)	d2 (mm)	Inner Ctn.	EDP No.	
T25x 65	4.4	4.70	10.0	6.0	10	635215
110	4.4	4.70	10.0	6.0	10	635216
T27x 65	4.96	5.26	11.5	6.5	10	635220
110	4.96	5.26	11.5	6.5	10	635221
T30x 65	5.49	5.79	11.5	6.5	10	635225
110	5.49	5.79	11.5	6.5	10	635226
T40x 65	6.6	6.90	11.5	7.5	10	635230
110	6.6	6.90	11.5	7.5	10	635231
T45x 65	7.77	8.0	—	8.0	10	635235
110	7.77	8.0	—	8.0	10	635236
T50x 65	8.79	8.8	—	H8	10	635240
110	8.79	8.8	—	H8	10	635241

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

# Bit Type B



No. B35  
Bit

Bits manufactured to meet specifications based on ISO. Width across flats 6.35 mm, hexagonal.





The Type B insertion entry is designed to work with the dimensions most commonly used by air tool manufacturers. There are some models that will not accept insertion of the double-head types, depending on the shape of the insertion chuck. Please make your selections while referring to the specifications table.



\*This is for illustrative purpose.

## Applicable models

Please check the model No. of your drivers before determining which bit(s) to choose.


Shape	Model No.	Page	Applicable models	
			 Air Screwdriver	 Electric Screwdriver
	B36	71P	<b>VESSEL</b> GT-S5TFR•S5TFB•S5TFG•S4TFR•S4TFS•S4TFG <b>Uryu</b> US-40•3.5A•4•4PB/ US-LTOOA/AL series <b>Yokota</b> YD-3•4•400SC	<b>VESSEL</b> VE-4000•4000P•4500•4500P
	B34	71P	<b>VESSEL</b> GT-S4TFR•S4TFS•S4TFG•S5TFR•S5TFB•S5TFG <b>Uryu</b> US-40•3.5A•4•4PB (Except B44 Socket Bit Overall Length 70mm) US-LTOOA/AL series <b>Yokota</b> YD-3•4•400SC	<b>VESSEL</b> VE-4000•4000P•4500•4500P <b>Hios</b> PG-7000, BLG-5000BC1/-15/-20-HT BLG-5000/-15/-20/HT, BL-5000/-15/-20-5020-7000/-20 CL-4000-6000-6500-7000 SS-4000-6500-7000, α-4500-5000-6500 CD-4000-5000-6000-7000 VB-1510/-18-1820-3012-2008-3020 VZ-1510-1812-1820-3012-3007 <b>Delvo</b> DLV ○○○○-EJN/-DJN/-DJE DLV 7(8)120-SPC-7(8)130-SPC-7(8)140-SPC- 7(8)241-SPC-7(8)231-SPC DLV 30LL(P)-SPC-30SL(P)-SPC-30HL(P)-SPC <b>Hitachi Koki</b> WT 3G/3GP•4G/4GP•5G/5GP <b>Kanon</b> 3K-120L•180L•180LF•120P•180P•180PF 9K-130P•140P•130PF•131L•131LF•131P•131PF 5KD-200-300 <b>Panasonic</b> FE-A3105-A310MH-A310L-A111L-A111MH-A111M-A710AXN-A710MHN
	B43	72P	<b>Uryu</b> UX-U•UW•ALPHA•UL•UEP•UAT•UA•UDP all driver type US-350W•450WB•5-50-5PB•○○W/PW-LTOOB/BL/PB <b>NPK ND-○○○X, NPW-○○○X</b>	<b>Yokota</b> YBX-50A <b>Tonichi</b> AUR5N-U(Except U1000CN)•UR-DU
	M-B43			●Following Tool models are applicable only for the single end bits.
	B43P	73P	<b>Fuji Kuki</b> FLT series D-1•D-2 FPT series D-1, FL series D-1, FPW series D-1 FW series D-1•D-2•D-6•D-7•D-8, FD series D-4•D-5	<b>Hios</b> PG-7000 BLG-4000BC1•5000BC1/-15/-20-HT BLG-4000-5000/-15/-20/HT BL-3000-5000/-15/-20-5020-7000-9000 CL-4000-6000-6500-7000-9000 SS-4000-6500-7000 α-4500-5000-6500 CD-4000-5000-6000-7000 VB-1510/-18-1820-3012-4504-2008-3020 VBH-1820-3012 VZ-1510-1812-1820-3012-3007-4504-4506 VZH-1820-3012
	B43H			
	B43B	73P	<b>Yutani</b> D-6SPBL•5WPB•6WSBEL•6WSHPEB•600SHEB- 604B-8WPB•65SBEL•6WSHSEB DH-6PL•4.5PEB•6PLE•4.5SB•6SELB HPW-4D-6D•6aD-8aD-4SD-6SD-6aSD	
	BT43			
	BT43P			
	B35	73P ~76P	<b>Yokota</b> TKa60A-70A-80A YEX-120A-150A-501A-100SA-120SA-150SA- 300SA-500SA YLa60A-70A-80A YLT50A-60A-70A-60AL-70AL	<b>Delvo</b> DLV ○○○○-EKN/-DKN/-DKE DLV 8150-SPC-7(8)251-SPC DLV 45LL(P)-SPC-45SL(P)-SPC-70LL(P)-SPC
	J	74, 75P		
	IP	75P		
	X5000	76P	Y-40SA-41A-46A YX-80A-180A-280A-380A-500A-280A-380A- 500A-180SA-280SA-380SA-500SA-280CA-500CA YBX-50A	
	B45	77P		
	MB45		YD-4005CA-500SCA-5PHCA-3A-4A-4.5SZ-5A- 4.5LAZ-6WAZK-600SZ-40PZ-4.5PZK-600PZ- 650PZ-65PTZ-65PZ-670A-670A-F-670A-R-670A-RF	
	MB45S	78P		
	MB45D		Atlas-Copco LUM•LUF•LUD•TWIST•COMBI series	
	HB	86P		
	HBM			
	DBHM	87P		
	MMBC	88P		
	B39	76P	<b>VESSEL</b> GT- H4RC-H5RC-S6CD-PLRC <b>Uryu</b> US-3.5ACB-4CA-5CA- LT30B-○○C-LT40B-○○C	<b>Yutani</b> D-6WHCL <b>Yokota</b> YD-600L YX-280CA-500CA
				<b>Kanon (Old model)</b> CN 60LTDK~N 10LTDK(N6~N100LTDK) CN 60STDK~N 10STDK(N6~N100STDK) CN 100~CN 500DPSK(N10~N50DPSK) CN 100~CN 500DPSK-L(N10~N50DPSK) CN 15/CN 30LTDK-H(N1.5/N3LTDK-H) DTDK-CN 500EXL(DTDK-N5EXL)



Manual type Torque Screwdriver

**No. B34 Bit**

- For assembly work focusing on workability.
- Hexagonal shape with the width across flats of 5mm is also suited for electric drivers.

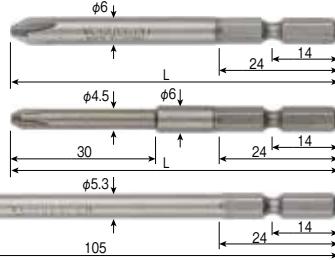

Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1 x 70	H	10	100	422031
100	H	10	100	422032
150	H	10	100	422033
⊕ 1 x 4 x 70	H	10	100	422048
⊕ 1 x 4 x 30 x 70	H	10	100	446335
⊕ 1 x 5.3 x 105	H	10	100	422034
★ 120	X	10	100	422040
120	H	10	100	422035
⊕ 2 x 70	H	10	100	422041
100	H	10	100	422042
120	H	10	100	422045
150	H	10	100	422043
200	H	10	100	422044
⊕ 2 x 3 x 30 x 75	H	10	100	446340
⊕ 2 x 4.5 x 70	H	10	100	422049
⊕ 2 x 5.3 x 105	H	10	100	422046
120	H	10	100	422047
H 2 x 70	H	10	100	422071
H 2.5 x 70	H	10	100	422072
H 3 x 70	H	10	100	422073
H 4 x 70	H	10	100	422074
H 5 x 70	H	10	100	422075

**No. N TORX Bit**

- For TORX screws popular in the automotive industry.




Size TipxOverall Length (mm)	mm	d1	L1	d2 (mm)	Inner Ctn.	EDP No.
T5 x 75	1.37	1.67	6.5	4.0	10	635498
100	1.37	1.67	6.5	4.0	10	635499
T6 x 75	1.65	1.95	6.5	4.0	10	635500
100	1.65	1.95	6.5	4.0	10	635501
T8 x 75	2.3	2.60	7.0	4.5	10	635505
100	2.3	2.60	7.0	4.5	10	635506
T10 x 75	2.72	3.02	7.5	4.5	10	635510
100	2.72	3.02	7.5	4.5	10	635511
T15 x 75	3.26	3.56	7.5	4.5	10	635515
100	3.26	3.56	7.5	4.5	10	635516
T20 x 75	3.84	4.14	7.5	5.0	10	635520
100	3.84	4.14	7.5	5.0	10	635521
T25 x 75	4.4	4.70	8.0	5.0	10	635525
100	4.4	4.70	8.0	5.0	10	635526
T27 x 75	4.96	5.26	8.0	5.5	10	635530
100	4.96	5.26	8.0	5.5	10	635531

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. N TORX Bit (Tamper-Proof)**

- For TORX screws popular in the automotive industry.
- With a round hole for tamper-proof.




Size TipxOverall Length (mm)	mm	d1	L1	d2 (mm)	Inner Ctn.	EDP No.
T10Hx 75	2.72	3.02	7.5	4.5	10	635551
100	2.72	3.02	7.5	4.5	10	635552
T15Hx 75	3.26	3.56	7.5	4.5	10	635553
100	3.26	3.56	7.5	4.5	10	635554
T20Hx 75	3.84	4.14	7.5	5.0	10	635555
100	3.84	4.14	7.5	5.0	10	635556
T25Hx 75	4.4	4.70	8.0	5.0	10	635557
100	4.4	4.70	8.0	5.0	10	635558

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. B44 Socket Bit**

- Socket bit for Hex screws.

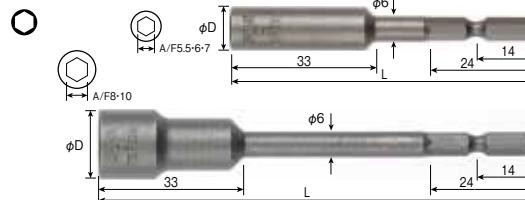

Size TipxOverall Length (mm)	φD	Drilling holes depth (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 5.5 x 70	9	25	10	250	422371
100	9	25	10	250	422381
6x 70	10	25	10	200	422372
100	10	25	10	200	422382
7x 70	11	25	10	200	422373
100	11	25	10	150	422383
8x 70	13	25	10	200	422374
100	13	25	10	150	422384
10x100	16	25	10	100	422385

**No. B36 Double End Bit**

- If one end breaks, the other end can be used.
- For assembly work focusing on workability.




Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1 x 70	H	10	100	423031
100	H	10	100	423032
⊕ 2x 70	H	10	100	423041
100	H	10	100	423042
150	H	10	100	423043
200	H	10	100	423044

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. B43 Double End Bit**


- If one end breaks, the other end can be used.
- For assembly work focusing on workability.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1× 75	H	10	100	425032
⊕ 2× 50	X	10	100	425036
50	H	10	100	425037
50	E	10	100	425038
75	X	10	100	425039
75	H	10	100	425040
75	G	10	100	425041
75	E	10	100	425042
100	X	10	100	425046
100	H	10	100	425047
100	G	10	100	425043
100	E	10	100	425044
150	X	10	100	425048
150	H	10	100	425049
150	G	10	100	425045
200	G	10	100	425050
300	H	10	100	446373
⊕ 3× 75	H	10	100	425054
75	E	10	100	425055
100	H	10	100	425057
100	E	10	100	425058
150	H	10	100	446375

**No. M-B43 Double End Bit (Magnetized)**

- If one end breaks, the other end can be used.
- For assembly work focusing on workability.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 75	H	10	100	446669
100	H	10	100	446672
150	H	10	100	446673

**No. B43P Double End Bit (Power tip)**

- If one end breaks, the other end can be used.
- Well balanced combination between tip precision and strength.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 75	H	10	100	425171
100	H	10	100	425172

**No. B43H TAPPING Bit (High power tip)**

- If one end breaks, the other end can be used.
- Reinforced tip for tapping work.



Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 75	H	10	100	425151
100	H	10	100	425153
150	H	10	100	425155

**No. B43B TAPPING Bit (Black tip)**



- If one end breaks, the other end can be used.
- Reinforced tip for tapping work.




Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2× 50	S	10	100	425141
75	S	10	100	425142
100	S	10	100	425143
150	S	10	100	425144

**One point****Bit selection I**

- Selecting Phillips tip suitable for screw head hole

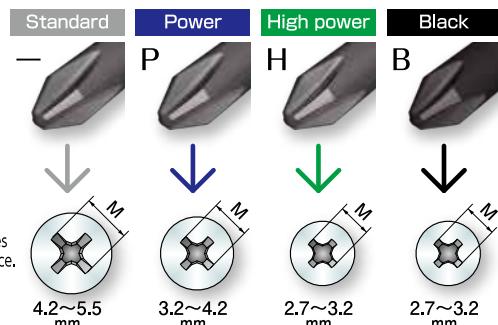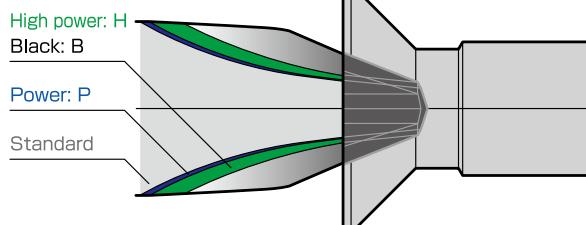


- Selecting Phillips tip according to hardness classification

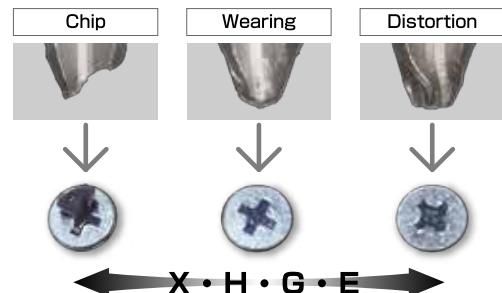


**No. BT43 TORSION Bit**


- If one end breaks, the other end can be used.
- For soft joint such as wood screws.

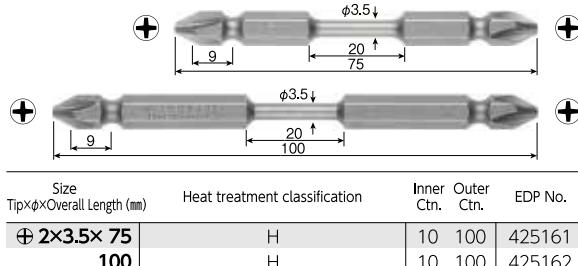**No. BT43P TORSION Bit (Power tip)**


- If one end breaks, the other end can be used.
- For hard joint such as drill screws.

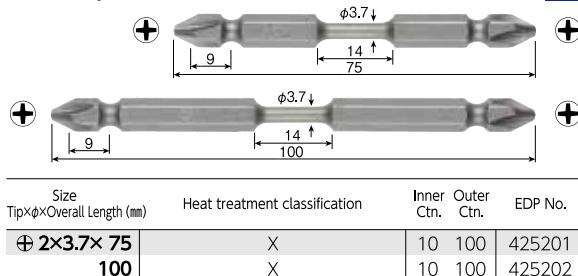**No. RS SUPER TORSION bit**


- If one end breaks, the other end can be used.
- Compatible with both A and B type chucks.
- For hard joint such as drill screws.

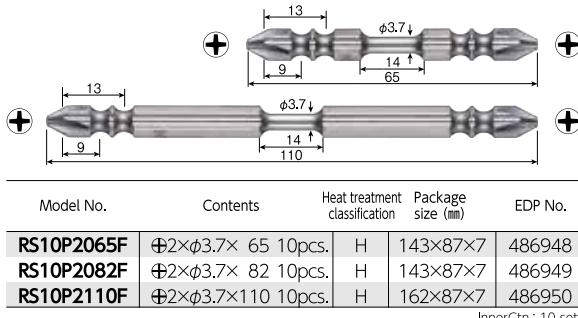**No. M-AB16 Recessed Bit (Magnetized)**

- Compatible with both A and B type chucks.
- Useful when using multiple fastening tools with different drive types in an assembly line.

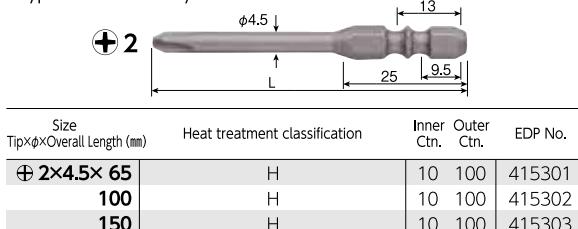**No. B35 Bit**


- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")

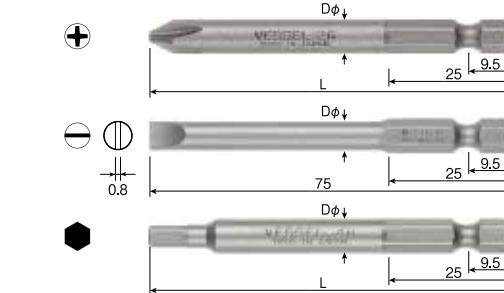

Size TipxφxOverall Length (mm)	Heat treatment classification	φD	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1 × 50	H	7.0	10	100	424032
75	X	7.0	10	100	424034
75	H	7.0	10	100	424035
⊕ 1 × 4.5x100	H	4.5	10	100	424036
⊕ 2 × 50	X	7.0	10	100	424061
50	G	7.0	10	100	424040
75	X	7.0	10	100	424062
75	H	7.0	10	100	424047
75	G	7.0	10	100	424041
75	E	7.0	10	100	424042
100	H	7.0	10	100	424048
100	G	7.0	10	100	424043
100	E	7.0	10	100	424044
150	H	7.0	10	100	424049
150	G	7.0	10	100	424045
150	E	7.0	10	100	424046
⊕ 2 × 4.5x100	H	4.5	10	100	424038
⊕ 3 75	H	7.0	10	100	424050
75	E	7.0	10	100	424051
100	H	7.0	10	100	424052
100	E	7.0	10	100	424053
150	G	7.0	10	100	424054
⊕ 6 × 75	E	6.0	10	100	424075
⊖ 6.35x0.97tx 49 (1524)	H	6.35	10	100	487245
⊖ 7.9x1.17tx 49 (1526)	H	7.92	10	100	487255
* ⊖ 6.99x1.07tx 76 (1565)	H	6.99	10	100	446464
H 2 × 75	H	7.0	10	100	424080
100	H	7.0	10	100	424081
H2.5 × 75	H	7.0	10	100	424082
100	H	7.0	10	100	424083
150	H	7.0	10	100	424093
H 3 × 75	H	7.0	10	100	424084
100	H	7.0	10	100	424085
150	H	7.0	10	100	424094
H 4 × 49 (21204)	H	4.6	10	100	487282
75	H	7.0	10	100	424086
100	H	7.0	10	100	424087
150	H	7.0	10	100	424095
H 5 × 49 (21205)	H	5.8	10	100	487283
75	G	7.0	10	100	424088
100	G	7.0	10	100	424089
150	G	7.0	10	100	424096
H 6 × 49 (21206)	H	—	10	100	487284
75	G	7.0	10	100	424090
100	G	7.0	10	100	424091
150	G	7.0	10	100	424097
* H 6 × 70 (1336/70)	G	7.0	10	100	489295
* H 7 × 70 (1337/70)	G	10.0	10	100	489296
* H 9 × 70 (1339/70)	G	11.0	10	100	489298

**No. B35 Bit**


- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")

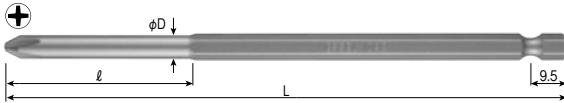

Model No.	Heat treatment classification	Tip	φD	l	L	Inner Ctn.	Outer Ctn.	EDP No.
1092	H	⊕2	6.35	50	152	10	100	487208

**No. B35 Bit**


- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")



Model No.	Heat treatment classification	Tip	φD	l	L	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 00×1.2×20×60	H	⊕00	1.2	20	60	10	100	446126
⊕ 00×2×40×100	H	⊕00	2.0	40	100	10	100	446141
⊕ 01×1.4×30×60	H	⊕0	1.4	30	60	10	100	446145
* ⊕ 01×1.4×30×100	H	⊕0	1.4	30	100	10	100	446147
⊕ 02×20×60	H	⊕0	2.0	20	60	10	100	446153
⊕ 02×30×100	H	⊕0	2.0	30	100	10	100	446157

**No. B35 Bit**


- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")

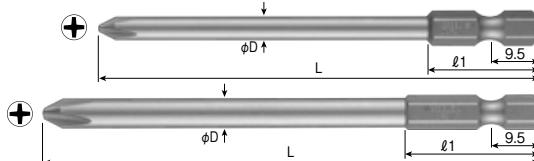

Model No.	Heat treatment classification	Tip	φD	l1	L	Inner Ctn.	Outer Ctn.	EDP No.
10600	H	⊕00	1.58	21	49	10	100	446423
1060	H	⊕0	3.17	21	49	10	100	487195
1081	H	⊕1	4.76	21	89	10	100	487202
* 4301/150	H	⊕1	4.5	27	150	10	100	489672
* 4302/51	H	⊕2	6.0	27	51	10	100	489229
4302/100	H	⊕2	6.0	27	100	10	100	489255
* 4302/127	H	⊕2	6.0	27	127	10	100	446435
4302/150	H	⊕2	6.0	27	150	10	100	489673
4302/200	H	⊕2	6.0	27	200	10	100	446439
1062	H	⊕2	6.35	21	49	10	100	487205
1072	H	⊕2	6.35	21	70	10	100	487206
1082	H	⊕2	6.35	21	89	10	100	487207

**No. B35 Bit**


- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")



Model No.	Heat treatment classification	Tip	φD	l1	L	Inner Ctn.	Outer Ctn.	EDP No.
1063	H	⊕3	8.0	25	49	10	100	487210
* 1073	H	⊕3	8.0	25	70	10	100	487211
1083	H	⊕3	8.0	25	89	10	100	487212
* 4303/100	H	⊕3	8.0	25	100	10	100	489256

**No. J TORX Bit (Tamper-Proof)**

- For TORX screws used in the automotive industry.
- With a round hole for tamper-proof.



Model No.	mm	d1	L1	d2	Inner Ctn.	EDP No.
T6H × 75	1.65	1.95	6.5	4.0	10	635283
100	1.65	1.95	6.5	4.0	10	635284
T8H × 75	2.3	2.60	7.0	4.5	10	635285
100	2.3	2.60	7.0	4.5	10	635286
T10H× 49 (T10610H)	2.72	3.02	7.5	3.96	10	446533
70 (T10710H)	2.72	3.02	7.5	3.96	10	446544
75	2.72	3.02	7.5	4.5	10	635251
100	2.72	3.02	7.5	4.5	10	635252
T15H× 75	3.26	3.56	7.5	4.5	10	635255
100	3.26	3.56	7.5	4.5	10	635256
T20H× 49 (T10620H)	3.84	4.14	7.5	4.37	10	446535
70 (T10720H)	3.84	4.14	7.5	4.37	10	446546
75	3.84	4.14	7.5	5.0	10	635261
100	3.84	4.14	7.5	5.0	10	635262
T25H× 75	4.4	4.70	8.0	5.0	10	635265
100	4.4	4.70	8.0	5.0	10	635266
T27H× 75	4.96	5.26	8.0	5.5	10	635271
100	4.96	5.26	8.0	5.5	10	635272
T30H× 75	5.49	5.79	8.5	6.0	10	635275
100	5.49	5.79	8.5	6.0	10	635276
T40H× 75	6.6	—	—	7.0	10	635281
100	6.6	—	—	7.0	10	635282


TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. B35 Bit**

- For assembly work focusing on workability.
- International standards compatible H 6.35mm(1/4")




Model No.	(mm)	φD	Inner Ctn.	EDP No.
* ⊕ 1×3/16"×100(41081)		4.76	10	446428
* ⊕ 2×3/16"×100(42081)		4.76	10	446429

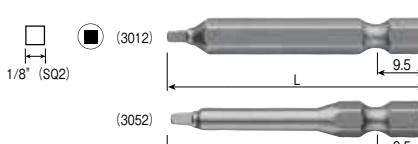**No. B35 Square Bit**

Model No.	Heat treatment classification	Inner Ctn.	EDP No.
* SQ2 ×49 (3012)	H	10	487292
* SQ2 ×90 (3052)	H	10	487307

**No. J TORX Bit**

●For TORX screws used in the automotive industry.



Model No.	(mm)	Tip	d1	L1	d2 (mm)	Inner Ctn.	EDP No.
T5 × 49 (T10605)	1.37	1.67	6.5	3.18	10	446486	
70 (T10705)	1.37	1.67	6.5	3.18	10	447355	
89 (T10805)	1.37	1.67	6.5	3.18	10	447356	
T6 × 75	1.65	1.95	6.5	4.0	10	635300	
100	1.65	1.95	6.5	4.0	10	635301	
152 (T10906)	1.65	1.95	6.5	3.18	10	447317	
T7 × 70 (T10707)	1.97	2.27	6.5	3.18	10	446499	
75	1.97	2.27	6.5	4.0	10	635303	
90 (T10807)	1.97	2.27	6.5	3.18	10	446509	
152 (T10907)	1.97	2.27	6.5	3.18	10	446519	
T8 × 49 (T10608)	2.3	2.6	7.0	3.18	10	446489	
70 (T10708)	2.3	2.6	7.0	3.18	10	446500	
75	2.3	2.6	7.0	4.5	10	635305	
90 (T10808)	2.3	2.6	7.0	3.18	10	446510	
100	2.3	2.6	7.0	4.5	10	635306	
152 (T10908)	2.3	2.6	7.0	3.18	10	446520	
T9 × 70 (T10709)	2.5	2.78	7.0	3.18	10	446501	
90 (T10809)	2.5	2.78	7.0	3.18	10	446511	
152 (T10909)	2.5	2.78	7.0	3.18	10	446521	
T10× 49 (T10610)	2.72	3.02	7.5	3.96	10	446491	
70 (T10710)	2.72	3.02	7.5	3.96	10	446502	
75	2.72	3.02	7.5	4.5	10	635310	
100	2.72	3.02	7.5	4.5	10	635311	
152 (T10910)	2.72	3.02	7.5	3.96	10	446522	
T15× 49 (T10615)	3.26	3.56	7.5	3.96	10	446492	
70 (T10715)	3.26	3.56	7.5	3.96	10	446503	
75	3.26	3.56	7.5	4.5	10	635315	
90 (T10815)	3.26	3.56	7.5	3.96	10	446513	
100	3.26	3.56	7.5	4.5	10	635316	
152 (T10915)	3.26	3.56	7.5	3.96	10	446523	
T20× 49 (T10620)	3.84	4.14	4.75	4.37	10	446493	
70 (T10720)	3.84	4.14	4.75	4.37	10	446504	
75	3.84	4.14	7.5	5.0	10	635320	
100	3.84	4.14	7.5	5.0	10	635321	
152 (T10920)	3.84	4.14	7.5	4.37	10	446524	
T25× 70 (T10725)	4.4	4.7	8.0	5.0	10	446505	
75	4.4	4.7	8.0	5.0	10	635325	
100	4.4	4.7	8.0	5.0	10	635326	
152 (T10925)	4.4	4.7	8.0	4.75	10	446525	
T27× 75	4.96	5.26	8.0	5.5	10	635330	
100	4.96	5.26	8.0	5.5	10	635331	
152 (T10927)	4.96	5.26	8.0	6.35	10	446526	
T30× 70 (T10730)	5.49	5.79	8.5	6.35	10	446507	
75	5.49	5.79	8.5	6.0	10	635335	
90 (T10830)	5.49	5.79	8.5	6.35	10	446517	
100	5.49	5.79	8.5	6.0	10	635336	
152 (T10930)	5.49	5.79	8.5	6.35	10	446527	
T40× 49 (T10640)	6.6	—	—	7.0	10	446497	
70 (T10740)	6.6	—	—	8.0	10	446508	
75	6.6	—	—	8.0	10	635340	
90 (T10840)	6.6	—	—	8.0	10	446518	
100	6.6	—	—	7.0	10	635341	
152 (T10940)	6.6	—	—	8.0	10	446528	
T45× 75	7.77	—	—	8.0	10	635345	
100	7.77	—	—	8.0	10	635346	

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).

VESSEL has a manufacturing license in Japan and selling same to the world.

**No. IP TORX Plus Bit**

●For TORX Plus screws used for various assembly lines.



Model No.	Tip	mm	Overall Length (mm)	Inner Ctn.	EDP No.
IP10906	6IP	1.64	152	10	447251
IP10907	7IP	1.99	152	10	447252
IP10908	8IP	2.31	152	10	447253
IP10609	9IP	2.5	49	10	447229
IP10709	9IP	2.5	70	10	447236
IP10809	9IP	2.5	90	10	447243
IP10909	9IP	2.5	152	10	447226
IP10810	10IP	2.74	90	10	447244
IP10910	10IP	2.74	152	10	447254
IP10615	15IP	3.27	49	10	447230
IP10715	15IP	3.27	70	10	447237
IP10815	15IP	3.27	90	10	447245
IP10915	15IP	3.27	152	10	447255
IP10620	20IP	3.86	49	10	447231
IP10720	20IP	3.86	70	10	447238
IP10820	20IP	3.86	90	10	447246
IP10920	20IP	3.86	152	10	447256
IP10625	25IP	4.43	49	10	447232
IP10725	25IP	4.43	70	10	447239
IP10825	25IP	4.43	90	10	447247
IP10925	25IP	4.43	152	10	447257
IP10630	30IP	5.52	49	10	447234
IP10730	30IP	5.52	70	10	447241
IP10830	30IP	5.52	90	10	447249
IP10930	30IP	5.52	152	10	447259
IP10640	40IP	6.65	49	10	447235
IP10740	40IP	6.65	70	10	447242
IP10840	40IP	6.65	90	10	447250
IP10940	40IP	6.65	152	10	447260

**No. B35 SUPADRIV Bit**

●For SUPADRIV screws. ●Special tip shape prevents cam-out.



Model No.	(mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
SDV1× 75		H	10	100	636121
SDV2× 75		H	10	100	636122
100		H	10	100	636123
SDV3× 75		H	10	100	636130

**No. 1733/50, 1735/50 BALL POINT Bit**


●For hexagon socket head cap bolts and screws.



Model No.	(mm)	φD	Tip (mm)	Inner Ctn.	EDP No.
* BP3× 50 (1733/50)		4	3	10	446579
* BP5× 50 (1735/50)		6	5	10	446581

**No. B35 POZIDRIV Bit**


●For POZIDRIV screws. ●Special tip shape prevents cam-out.



Model No.	Heat treatment classification	Tip	$\phi D$	$l$	L (mm)	Inner Ctn.	Outer Ctn.	EDP No.
* PZ0 × 2 × 60	H	PZ0	2.0	20	60	10	100	447301
* PZ0 × 3 × 60	H	PZ0	3.0	20	60	10	100	447303
PZ1 × 50	H	PZ1	4.8	—	50	10	100	424101
PZ2 × 50	H	PZ2	6.3	—	50	10	100	424102
PZ3 × 50	H	PZ3	8.0	—	50	10	100	424103

**No. B35 POZIDRIV Bit**


●For POZIDRIV screws. ●Special tip shape prevents cam-out.

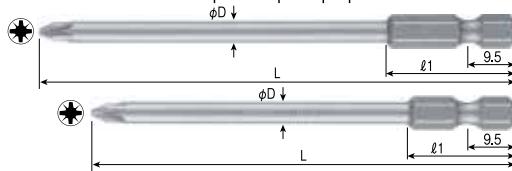

Model No.	Heat treatment classification	Tip	$\phi D$	$l_1$	L (mm)	Inner Ctn.	Outer Ctn.	EDP No.
* 1071PZ	H	PZ1	4.76	21	70	10	100	487216
* 1081PZ	H	PZ1	4.76	21	89	10	100	487217
* 4301/100PZ	H	PZ1	4.5	27	100	10	100	489257
* 4302/100PZ	H	PZ2	6.0	27	100	10	100	489258
* 4302/127PZ	H	PZ2	6.0	27	127	10	100	446445
* 4302/150PZ	H	PZ2	6.0	27	150	10	100	489674
* 4302/200PZ	H	PZ2	6.0	27	200	10	100	446449
* 1062PZ	H	PZ2	6.35	21	49	10	100	487220
1062PZ	X	PZ2	6.35	21	49	10	100	487523
* 1082PZ	H	PZ2	6.35	21	89	10	100	487222

**No. B35 POZIDRIV Bit**

●For POZIDRIV screws. ●Special tip shape prevents cam-out.

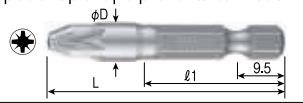

Model No.	Heat treatment classification	Tip	$\phi D$	$l_1$	L (mm)	Inner Ctn.	Outer Ctn.	EDP No.
* 1063PZ	H	PZ3	8.0	29	49	10	100	487225
* 4304/51PZ	H	PZ4	8.0	29	51	10	100	489234

**No. B39 Bit**

●For assembly work focusing on workability.



Model No.	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1× 23	H	10	100	424131
⊕ 2× 23	H	10	100	424141
40	H	10	100	424143
100	H	10	100	424147
* ⊕2×4.8×25×150(1092-2)	H	10	—	487209
* ⊕3×6.3×25× 50(1063-2)	H	10	—	487214

**No. B39 POZIDRIV Bit**

●For POZIDRIV screws. ●Special tip shape prevents cam-out.



Model No.	Heat treatment classification	Inner Ctn.	EDP No.
* PZ2×4.8×25×150(1092PZ-2)	H	10	487224

**No. B39 3-Flute Fastening Bit**

●For fastening screws used in aircraft, special vehicles, etc.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
TW1×40	H	10	100	424201
TW2×40	H	10	100	424202
TW3×40	H	10	100	424203
TW4×40	H	10	100	424204
TW5×40	H	10	100	424205

**No. X50 Adapters**

●Hex socket adaptors.



Model code	SQ	Overall Length (mm)	Inner Ctn.	EDP No.
X5001	1/4"	35	10	487380
X5003	1/4"	75	10	487382
X5004	1/4"	100	10	487383
X5005	1/4"	150	10	487384
X5012	3/8"	50	10	487391
X5013	3/8"	75	10	487392
X5014	3/8"	100	10	487393
X5015	3/8"	150	10	487394

**No. A5 TORX Bit**

●For TORX screws used in the automotive industry.



Size Tip	mm	Overall Length (mm)	Inner Ctn.	EDP No.
T30	5.49	32	10	635427
T40	6.6	32	10	635428
T45	7.77	32	10	635429
T50	8.79	32	10	635430

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.

 H 6.35 mm
**No. B45/13\*\* Socket Bit**

●Socket bit for Hex screws.






A/F5.5×7×11×75

A/Fx11×100

A/F7×8

A/F10-12×13-14





Model No.	(mm)	A/F	φD	l1	l2	OAL (mm)	Inner Ctn.	EDP No.
1304/50	4	8	3	15	50	10	489301	
1304/75	4	8	3	25	75	10	489314	
1304/100	4	8	3	25	100	10	489327	
1345/50	4.5	8	3	15	50	10	489302	
1345/75	4.5	8	3	25	75	10	489315	
1345/100	4.5	8	3	25	100	10	489328	
1305/50	5	8.5	3.5	15	50	10	489303	
1305/75	5	8.5	3.5	25	75	10	489316	
1305/100	5	8.5	3.5	25	100	10	489329	
1305/150	5	8.5	3.5	25	150	10	446602	
1355/50	5.5	9	3.5	15	50	10	489304	
A/F5.5×75	5.5	9	3.5	25	75	10	424281	
A/F5.5×100	5.5	9	3.5	25	100	10	424380	
A/F5.5×150	☆ 5.5	9	3.5	25	150	10	424265	
1306/50	6	10	4	15	50	10	489305	
A/F6×75	☆ 6	10	4	25	75	10	424282	
A/F6×100	6	10	4	25	100	10	424381	
A/F6×150	☆ 6	10	4	25	150	10	424266	
1307/50	7	13	5	15	50	10	489306	
A/F7×11×75	7	11	4.5	25	75	10	424279	
A/F7×11×100	7	11	4.5	25	100	10	424280	
A/F7×75	☆ 7	13.5	5.5	22	75	10	424283	
A/F7×100	☆ 7	13.5	5.5	22	100	10	424382	
A/F7×150	☆ 7	13.5	5.5	22	150	10	424267	
1308/50	8	13	5	15	50	10	489307	
A/F8×75	☆ 8	13.5	6.5	22	75	10	424284	
A/F8×100	☆ 8	13.5	6.5	22	100	10	424383	
A/F8×150	☆ 8	13.5	6.5	22	150	10	424483	
1309/50	9	14	5.5	15	50	10	489308	
A/F9X75	☆ 9	15	6.5	22	75	10	424268	
A/F9×100	☆ 9	15	6.5	22	100	10	424269	
1310/50	10	16	6.5	15	50	10	489309	
A/F10×75	☆ 10	16	6.5	22	75	10	424286	
A/F10×100	☆ 10	16	6.5	22	100	10	424384	
A/F10×150	☆ 10	16	6.5	22	150	10	424484	
1311/50	11	17	7	15	50	10	489310	
A/F11×75	☆ 11	17	7	22	75	10	424270	
A/F11×100	☆ 11	17	7	22	100	10	424271	
1312/50	12	19	7.5	15	50	10	489311	
A/F12×75	☆ 12	18	8	22	75	10	424287	
A/F12×100	☆ 12	18	8	22	100	10	424385	
A/F12×150	☆ 12	18	8	22	150	10	424272	
1313/50	13	19	8	15	50	10	489312	
A/F13×75	☆ 13	19	8	22	75	10	424288	
A/F13×100	☆ 13	19	8	22	100	10	424386	
A/F13×150	☆ 13	19	8	22	150	10	424273	
1314/50	14	20	8	15	50	10	489313	
A/F14×75	☆ 14	20	8	22	75	10	424289	
A/F14×100	☆ 14	20	8	22	100	10	424387	

☆...Adopts a patented axial press-fit shank technique

**No. MB45/13\*\*M Socket Bit (Press-Fit Magnet)**

●Socket bit for Hex screws.

●Holds the screw with a strong magnet, to prevent the screws from dropping.

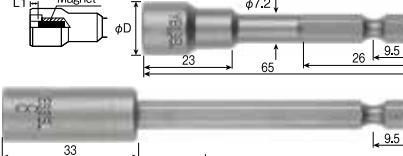


Model No.	(mm)	A/F	φD	l1	OAL (mm)	Inner Ctn.	EDP No.
1305/50M	5	8.5	3.5	50	10	489340	
1305/75M	5	8.5	3.5	75	10	489351	
1305/100M	5	8.5	3.5	100	10	489362	
1305/150M	5	8.5	3.5	150	10	446619	
1355/50M	5.5	9	3.5	50	10	489341	
1355/75M	5.5	9	3.5	75	10	489352	
1355/100M	5.5	9	3.5	100	10	489363	
1355/150M	5.5	9	3.5	150	10	446620	
1306/50M	6	10	4	50	10	489342	
1306/75M	6	10	4	75	10	489353	
1306/100M	6	10	4	100	10	489364	
1306/150M	6	10	4	150	10	446621	
1307/50M	7	13	4.5	50	10	489343	
A/F7×65	7	13	2.5	65	10	482520	
1307/75M	7	13	4.5	75	10	489354	
1307/100M	7	13	4.5	100	10	489365	
1307/150M	7	13	5	150	10	446622	
1308/50M	8	13	5	50	10	489344	
A/F8×65	☆ 8	13.5	3.17	65	10	482521	
A/F8×75	☆ 8	13.5	3.17	75	10	482523	
A/F8×100	☆ 8	13.5	3.17	100	10	482524	
A/F8×150	☆ 8	13.5	3.17	150	10	424274	
1309/50M	9	14	5.5	50	10	489345	
1309/75M	9	14	5.5	75	10	489356	
1309/100M	9	14	5.5	100	10	489367	
A/F3/8×65	☆ 9.6	15	3.96	65	10	482522	
1310/50M	10	16	6.5	50	10	489346	
A/F10×75	☆ 10	16	3.96	75	10	482525	
A/F10×100	☆ 10	16	3.96	100	10	482526	
A/F10×150	☆ 10	16	3.96	150	10	424275	
1311/50M	11	17	7	50	10	489347	
1311/75M	11	17	7	75	10	489358	
1311/100M	11	17	7	100	10	489369	
1312/50M	12	19	7.5	50	10	489348	
A/F12×75	☆ 12	18	5.5	75	10	424276	
A/F12×100	☆ 12	18	5.5	100	10	424277	
A/F12×150	☆ 12	18	5.5	150	10	424278	
1313/50M	13	19	8	50	10	489349	
1313/75M	13	19	8	75	10	489360	
1313/100M	13	19	8	100	10	489371	
1313/150M	13	19	8	150	10	446626	
1314/50M	14	20	8	50	10	489350	
1314/75M	14	20	8	75	10	489361	
1314/100M	14	20	8	100	10	489372	

☆...Adopts a patented axial press-fit shank technique

**No. MB45D Socket Bit (Sliding Magnet)**


- Socket bit for Hex screw.
- Holds the screw with sliding magnet, to prevent the screws from dropping.

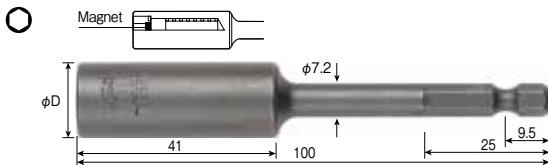

Model No.	(mm)	φD	Hole depth	(mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 8×100		13	36		10	100	482516
A/F 10×100		16	36		10	100	482517

**No. MB45S Socket Bit (Side Magnet)**


- Socket bit for Hex screw.
- Holds the screw with side magnet, to prevent the screws from dropping.

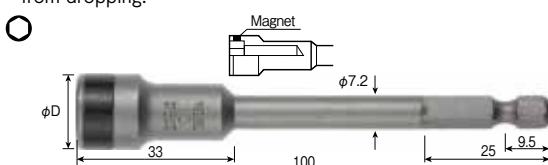

Model No.	(mm)	φD	Hole depth	(mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 8×100		13	25		10	100	482406
A/F 10×100		16	25		10	100	482407

**One point****Features of press-fit type sockets**

(Press-fit type: marked with a star symbol in the table of each model)

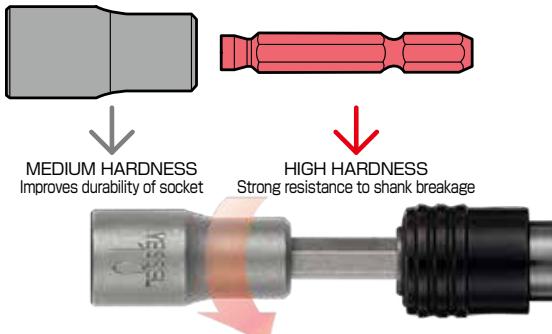

The shank and socket have been heat-treated to the best hardness and press-fit together. The socket part is strong against wear and shank against twisting, resulting in higher durability.

**Prevents shank breakage**

Torsion moment with a static torque

Normal type



Press-fit type



107  
N·m

No. DS73

## Shockless Bit



### High Precision Bit Tips

Bits with 4mm and 5mm shafts for use with a wide variety of small, electric drivers.

Our strong, durable bits undergo actual work tests, damage tests, and repeated fatigue tests before delivery to the market.

In our quest for ever-greater reliability, we employ torque analysis and screw-engagement checks that result in ultra high precision bit tips.



No. DS73

### Shockless Bit

Combination of special alloy steel + zinc die cast.

Less variation in inrush torque at seating, therefore tightening becomes consistent.

Moreover, the tip durability is improved significantly.

HAND TOOLS

BITS & SOCKETS

ELECTRIC TOOLS


AIR TOOLS

STATIC SOLUTIONS

GASOLINE ENGINE TOOLS

## Applicable models


Please check the model No. of your drivers before determining which bit(s) to choose.

Shape	Model NO.	Page	Applicable models	
			 Electric S/D (Precision type)	
 H 5 mm	 <b>B34</b>	<b>84P</b>	VESSEL VE-4000-4000P-4500-4500P	
			Hios PG-7000 BLG-5000BC1/-15/-20-HT BLG-5000/-15/-20/HT BL-5000/-15/-20-5020-7000/-20 CL-4000-6000-6500-7000	
			SS-4000-6500-7000 α-4500-5000-6500 CD-4000-5000-6000-7000 VB-1510/-18-1820-3012-2008-3020 VZ-1510-1812-1820-3012-3007	
	 <b>N</b>	<b>85P</b>	Delvo DLV ○○○○-EJN/-DJN/-DJE DLV 7(8)120-SPC-7(8)130-SPC-7(8)140-SPC-7(8)241-SPC-7(8)231-SPC DLV 30LL(P)-SPC-30SL(P)-SPC-30HL(P)-SPC	
			Hitachi Koki WT 3G/3GP-4G/4GP-5G/5GP	
			Kanon 3K-120L-180L-180LF-120P-180P-180PF, 9K-130P-140P-130PF-131L-131LF-131P-131PF, 5KD-200-300	
	 <b>B44</b>	<b>85P</b>	Panasonic FE-A310S-A310MH-A310L-A111L-A111MH-A111M-A710AXN-A710MHN	
			Delvo DLV ○○○○-BMN/-CMN/-EMN/-SB DLV 5820-5820H-5840 DLV 7410A-SPC-7410HA-SPC-7420A-SPC-7321-SPC-7331-SPC-7020-SPC-7030-SPC-7031-SPC-8020-SPC-8030-SPC-8031-SPC	
 φ 4 mm	 <b>D71</b>	<b>82P</b>	Delvo DLV ○○○○-BMN/-CMN/-EMN/-SB DLV 5820-5820H-5840 DLV 7410A-SPC-7410HA-SPC-7420A-SPC-7321-SPC-7331-SPC-7020-SPC-7030-SPC-7031-SPC-8020-SPC-8030-SPC-8031-SPC	
	 <b>D72</b>	<b>82P</b>		
 φ 4 mm	 <b>DS73</b>	<b>81P</b>	VESSEL VE-1500-1500EPA-2000-2000EPA-3000	
			Hios PG-3000-5000 BLG-4000BC1-5000BC1/-15/-20 BLG-4000-5000/-15/-20 BL-2000-3000-5000/-15/-20 CL-2000-3000-4000	
	 <b>D73</b>	<b>83P</b>	SS-2000-3000-4000 α-4500-5000 CD-4000-5000 VB-1510/-18 VZ-1510	
			Kanon 3K-110L-110P 2KD-100-200-300	
 φ 5 mm	 <b>D76</b>	<b>84P</b>	Hios CL-6000-6500-7000 SS-6500-7000 α-6500 CD-6000-7000	



## No. DS73 Shockless Bit

- Combination of special alloy steel and zinc die cast;
- Stable fastening torque and improved durability.
- Bit tip high-precision-machined to thread standards.

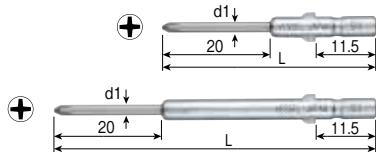


Model No.	(mm)	d1	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 00 × 1.5 × 40		1.5	10	100	483801
60		1.5	10	100	483802
⊕ 0 × 1.5 × 40		1.5	10	100	483809
60		1.5	10	100	483810
⊕ 0 × 1.7 × 40		1.7	10	100	483811
60		1.7	10	100	483812
⊕ 0 × 2.0 × 40		2.0	10	100	483813
60		2.0	10	100	483814

## No. DS73 Shockless Bit

PAT.

- Combination of special alloy steel and zinc die cast;
- Stable fastening torque and improved durability.
- Bit tip high-precision-machined to thread standards.

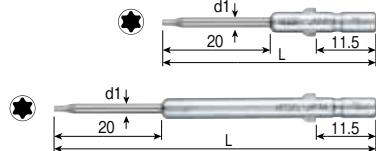


Model No.	(mm)	d1	Inner Ctn.	Outer Ctn.	EDP No.	
T5 × 2.0 × 40		1.37	2.0	10	100	483901
60		1.37	2.0	10	100	483902
T6 × 2.0 × 40		1.65	2.0	10	100	483903
60		1.65	2.0	10	100	483904

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.

# One point

## Advantage of Shockless Bit

Shockless Bit have cushioning characteristics to absorb the impact occurred when a screw is fully seated.  
Less variable inrush torque at the time of screw seating, realizing fastening stability

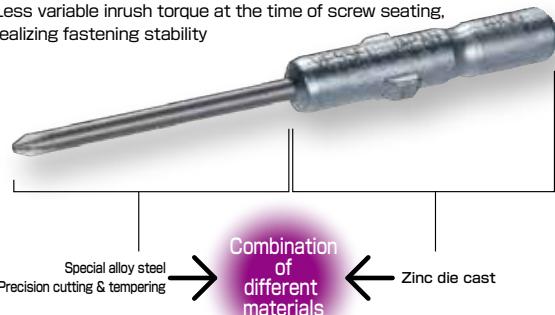


## ● Stable tightening torque

The combination of alloy steel and zinc creates a shockless effect and stabilizes the tightening torque.

### [Measurement of tightening waveform]

The load during screw tightening is indicated as a waveform

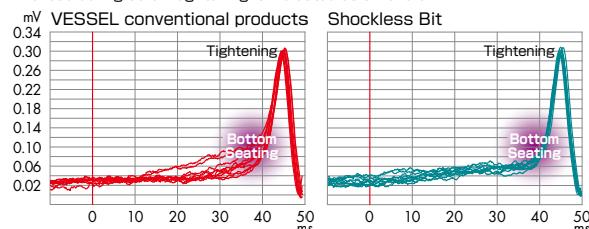

## ● Break-resistant with improved durability

The shockless effect of the alloy steel and zinc combination greatly improves the durability of the tool tip.

### [Driving durability test]


Number of tools which do not break when continuously screwed in by a screw tightening robot.



Cushion effect of combination of several materials enables the impact on the tip-end to be absorbed and makes the bit durable. This also leads to less damage on screw or workpieces as Shockless Bit is not merely hard but cushiony.

 •  $\phi 4$  mm
**No. D71 Bit**


- With crescentic shank shape in cross section; for fastening precision small screws.
- Bit tip high-precision-machined to thread standards.

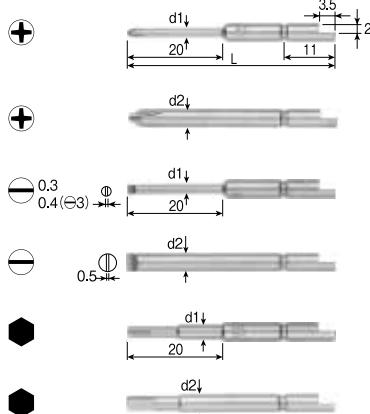

Model No.	(mm)	d1	d2	(mm)	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 00×1.5× 44		1.5	—	10	100	482901	
64		1.5	—	10	100	482902	
* ⊕ 00×2 × 64 (EPH204)		2.0	2.0	10	—	446293	
* ⊕ 00×2.5× 44 (EPH205)		2.5	2.0	10	—	446294	
⊕ 0 ×2 × 44		2.0	—	10	100	482911	
64		2.0	—	10	100	482912	
⊕ 0 ×2.5× 44		2.5	—	10	100	482913	
64		2.5	—	10	100	482914	
⊕ 1 ×3 × 44		3.0	—	10	100	482921	
64		3.0	—	10	100	482922	
⊕ 1 ×4 × 44		—	4.0	10	100	482923	
64		—	4.0	10	100	482924	
⊕ 2 ×4 × 44		—	4.0	10	100	482931	
64		—	4.0	10	100	482932	
⊕ 2 ×0.3× 44		2.0	—	10	200	482941	
⊕ 2.5×0.3× 44		2.5	—	10	200	482942	
⊕ 3 ×0.4× 44		3.0	—	10	200	482943	
⊕ 4 ×0.5× 44		—	4.0	10	200	482944	
H 1.5×2 × 44		2.0	—	10	200	482951	
H 2 ×3 × 44		3.0	—	10	200	482952	
H 2.5×3 × 44		3.0	—	10	200	482953	
H 3 ×4 × 44		—	4.0	10	200	482954	

 •  $\phi 4$  mm
**No. D71 TORX Bit**

- With crescentic shank shape in cross section; for fastening small screws for such as computers, HDDs.
- Bit tip high-precision-machined to thread standards.




Model No.	(mm)	mm	d1	Inner Ctn.	Outer Ctn.	EDP No.
T1 × 44		0.84	1.5	10	100	635601
T2 × 44		0.94	1.5	10	100	635602
T3 × 44		1.12	1.7	10	100	635603
T4 × 44		1.3	1.8	10	100	635604
T5 × 44		1.37	2.0	10	100	635605
T6 × 44		1.65	2.5	10	100	635606
T7 × 44		1.97	2.5	10	100	635607
T8 × 44		2.3	3.0	10	100	635608
T8H × 44 (ETX254)		2.3	4	10	200	446323
T9 × 44		2.48	3.0	10	100	635609
T10 × 44		2.72	3.0	10	100	635610
T15H × 44 (ETX259)		3.26	4	10	200	446328

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. D71 TORX Plus Bits**


- The earlobe-shaped protrusions on the tip-end provide **TORX** longer lifetime because they are designed to have the largest fitting area between the bit (which is designed to have large cross-sectional area) and the screw head recess, so as to disperse the stress while tightening.



Model No.	(mm)	IP	ϕD	ℓ	L	(mm)	Inner Ctn.	EDP No.
2IP × 44		2IP	1.5	20	44		10	447428
2IP × 64		2IP	1.5	20	64		10	447412
3IP × 44		3IP	1.7	20	44		10	447429
3IP × 64		3IP	1.7	20	64		10	447413

**No. D72 Socket Bit**


- With crescentic shank shape in cross section; for fastening precision small screws.
- Bit tip high-precision-machined to thread standards.

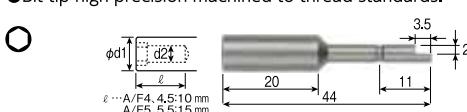

Model No.	(mm)	d1	d2	(mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 4 × 44		7	3	10	100	482961	
A/F 4.5× 44		7	3	10	100	482962	
A/F 5 × 44		8	4	10	100	482963	
A/F 5.5× 44		8	4	10	100	482964	

**No. D73 Bit**

- For fastening precision small screws.
- Bit tip high-precision-machined to thread standards.

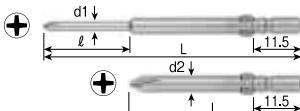

Model No. (mm)	Tip	$\ell$	d1	d2	L	Inner Ctn. (mm)	Outer Ctn.	EDP No.
⊕00×1.2×20×40	00	20	1.2	—	40	10	100	446001
⊕00×1.5×40	00	20	1.5	—	40	10	100	445981*(483001)
⊕00×1.5×60	00	20	1.5	—	60	10	100	483002
⊕00×1.5×80	00	20	1.5	—	80	10	100	483003
⊕00×1.7×20×40	00	20	1.7	—	40	10	100	446004
⊕00×2×40	00	20	2	—	40	10	100	445983*(483005)
⊕00×2×60	00	20	2	—	60	10	100	483006
⊕0×1.2×20×40	0	20	1.2	—	40	10	100	483007
⊕0×1.4×20×40	0	20	1.4	—	40	10	100	446016
⊕0×1.4×20×60	0	20	1.4	—	60	10	100	446017
⊕0×1.4×20×80	0	20	1.4	—	80	10	100	483008
⊕0×1.5×20×40	0	20	1.5	—	40	10	100	446022
⊕0×1.5×20×60	0	20	1.5	—	60	10	100	446076
⊕0×1.7×40	0	20	1.7	—	40	10	100	483010
⊕0×1.7×60	0	20	1.7	—	60	10	100	445986*(483011)
⊕0×1.7×80	0	20	1.7	—	80	10	100	483012
⊕0×1.8×60	0	20	1.8	—	60	10	100	483013
⊕0×2×20×40	0	20	2	—	40	10	100	446025
⊕0×2×20×60	0	20	2	—	60	10	100	446026
⊕0×2×30×60	0	30	2	—	60	10	100	446029
⊕0×2×20×80	0	20	2	—	80	10	100	446027
⊕0×2×20×100	0	20	2	—	100	10	100	446028
⊕0×2×120	0	20	2	—	120	10	100	483014
⊕0×2.5×40	0	20	2.5	—	40	10	100	483015
⊕0×2.5×60	0	20	2.5	—	60	10	100	483016
⊕0×2.5×20×80	0	20	2.5	—	80	10	100	446033
⊕0×2.5×20×100	0	20	2.5	—	100	10	100	446034
⊕0×2.5×120	0	20	2.5	—	120	10	100	483017
⊕1×2.5×20×40	1	20	2.5	—	40	10	100	446048
⊕1×3×40	1	20	3	—	40	10	100	483021
⊕1×3×20×60	1	20	3	—	60	10	100	446053
⊕1×3×20×80	1	20	3	—	80	10	100	446054
⊕1×3×20×100	1	20	3	—	100	10	100	446055
⊕1×3×20×120	1	20	3	—	120	10	100	483376
⊕1×4×40	1	—	—	4	40	10	100	483025
⊕1×4×60	1	—	—	4	60	10	100	446059
⊕1×4×80	1	—	—	4	80	10	100	483026
⊕1×4×100	1	—	—	4	100	10	100	483027
⊕1×4×120	1	—	—	4	120	10	100	483028
⊕1×4×150	1	—	—	4	150	10	100	483029
⊕1×4×180	1	—	—	4	180	10	100	483030
⊕1×4×200	1	—	—	4	200	10	100	483032
⊕2×4×40	2	—	—	4	40	10	100	483031
⊕2×4×60	2	—	—	4	60	10	100	446070
⊕2×4×80	2	—	—	4	80	10	100	446071
⊕2×4×100	2	—	—	4	100	10	100	446072
⊕2×4×120	2	—	—	4	120	10	100	446073
⊕2×4×150	2	—	—	4	150	10	100	483033


EDP number with mark \* will be shifted to the other number in parenthesis.

**Socket Bit**

Model No. (mm)	Size	$\phi D$	$l$ (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F2.3×40	A/F 2.3	6	40	10	100	483921
A/F2.5×40	A/F 2.5	6	40	10	100	483922
A/F3×40	A/F 3	6	40	10	100	483923
A/F4×60	A/F 4	7	60	10	100	483924
A/F4.5×60	A/F 4.5	7	60	10	100	483925
A/F5×60	A/F 5	8	60	10	100	483926
A/F5.5×60	A/F 5.5	8	60	10	100	483927

**No. D73 Bit**


- For fastening precision small screws.
- Bit tip high-precision-machined to thread standards.

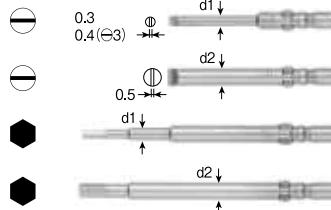

Model No. (mm)	d1	d2	Inner Ctn. (mm)	Outer Ctn.	EDP No.
⊖ 2 × 0.3 × 40	2.0	—	10	100	483041
⊖ 2.5 × 0.3 × 40	2.5	—	10	100	483042
⊖ 3 × 0.4 × 40	3.0	—	10	100	483043
⊖ 4 × 0.5 × 40	—	4.0	10	100	483044
H 1.5 × 2 × 60	2.0	—	10	100	483051
H 2 × 3 × 60	3.0	—	10	100	483052
H 2.5 × 3 × 60	3.0	—	10	100	483053
H 3 × 4 × 60	—	4.0	10	100	483054

**No. D73 TORX Bit**

- For fastening small screws for HDDs, etc.
- Bit tip high-precision-machined to thread standards.




Model No. (mm)	$\text{mm} \text{ } \square$	d1	Inner Ctn. (mm)	Outer Ctn.	EDP No.
T1 × 40	0.84	1.5	10	100	635621
T2 × 40	0.94	1.5	10	100	635622
T3 × 40	1.12	1.7	10	100	635623
T4 × 40	1.3	1.8	10	100	635624
T5 × 40	1.37	2.0	10	100	635625
T5 × 2×20×40	1.37	2.0	10	100	446107
60	1.37	2.0	10	100	446108
60	1.37	2.0	10	100	635695
T6 × 40	1.65	2.5	10	100	635626
T6 × 2×20×40	1.65	2.0	10	100	446109
60	1.65	2.0	10	100	446110
60	1.65	2.0	10	100	635696
T7 × 40	1.97	2.5	10	100	635627
T7 × 2×20×60	1.97	2.0	10	100	446113
T8 × 40	2.3	3.0	10	100	635628
T9 × 40	2.48	3.0	10	100	635629
T10 × 40	2.72	3.0	10	100	635630
T10H × 4 × 60	2.72	4.0	10	100	446119

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. D76 Bit**

- For fastening various small screws and tapping screws for sheet metals.
- Bit tip high-precision-machined to thread standards.

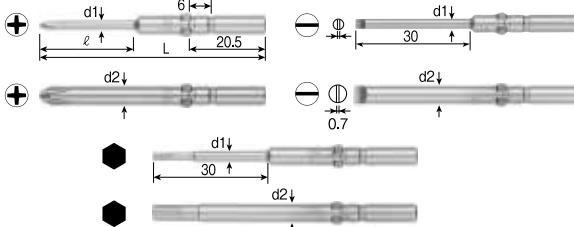

Model No.	(mm)	Tip	$\ell$	d1	d2	L	Inner (mm) Ctn.	Outer Ctn.	EDP No.
⊕00×2×60		00	20	2	—	60	10	100	446241*(483105)
⊕0×2×60		0	25	2	—	60	10	100	483106
⊕0×2.5×60		0	25	2.5	—	60	10	100	483115
⊕0×2.5×80		0	25	2.5	—	80	10	100	483116
⊕0×2.5×100		0	25	2.5	—	100	10	100	483117
⊕0×2.5×120		0	25	2.5	—	120	10	100	483118
⊕1×3×15×40		1	15	3	—	40	10	100	483119
⊕1×3×60		1	30	3	—	60	10	100	483121
⊕1×3×30×80		1	30	3	—	80	10	100	446267
⊕1×3×30×100		1	30	3	—	100	10	100	483122
⊕1×3×30×120		1	30	3	—	120	10	100	483123
⊕1×5×40		1	—	—	5	40	10	100	483124
⊕1×5×60		1	—	—	5	60	10	100	483125
⊕1×5×80		1	—	—	5	80	10	100	483126
⊕1×5×100		1	—	—	5	100	10	100	483127
⊕1×5×120		1	—	—	5	120	10	100	483128
⊕1×5×150		1	—	—	5	150	10	100	483129
⊕1×5×180		1	—	—	5	180	10	100	483130
⊕1×5×200		1	—	—	5	200	10	100	483132
⊕1×5×250		1	—	—	5	250	10	100	483133
⊕1×5×300		1	—	—	5	300	10	100	483134
⊕2×5×40		2	—	—	5	40	10	100	483135
⊕2×5×60		2	—	—	5	60	10	100	483131
⊕2×5×80		2	—	—	5	80	10	100	446279
⊕2×5×100		2	—	—	5	100	10	100	446280
⊕2×5×120		2	—	—	5	120	10	100	446281
⊕2×5×150		2	—	—	5	150	10	100	446282
⊕2×5×180		2	—	—	5	180	10	100	483136
⊕2×5×200		2	—	—	5	200	10	100	483137
⊕2×5×250		2	—	—	5	250	10	100	483138
⊕2×5×300		2	—	—	5	300	10	100	483139
⊕2×5×400		2	—	—	5	400	10	100	483140
⊕3×0.4×60		⊕3×0.4t	30	3	—	60	10	100	483141
⊕4×0.6×60		⊕4×0.6t	30	4	—	60	10	100	483142
⊕5×0.7×60		⊕5×0.7t	—	—	5	60	10	100	483143
H2×3×70		H2	30	3	—	70	10	100	483151
H2.5×3×70		H2.5	30	3	—	70	10	100	483152
H3×4×70		H3	30	4	—	70	10	100	483153
H4×5×70		H4	—	—	5	70	10	100	483154


EDP number with mark \* will be shifted to the other number in parenthesis.

**Socket Bit**

Model No.	(mm)	Size	$\phi D$	L (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F4×60		A/F 4	7	60	10	100	483941
A/F4.5×60		A/F 4.5	7	60	10	100	483942
A/F5×60		A/F 5	8	60	10	100	483943
A/F5.5×60		A/F 5.5	8	60	10	100	483944

**No. D76 TORX Bit**

- For fastening small screws for HDDs, etc.
- Bit tip high-precision-machined to thread standards.



Model No. (mm)	mm	d1	Inner Ctn.	Outer Ctn.	EDP No.
T5 × 60		1.37	2.0	10 100	635651
T6 × 60		1.65	2.5	10 100	635652
T7 × 60		1.97	2.5	10 100	635653
T8 × 60		2.3	3.0	10 100	635654
T9 × 60		2.48	3.0	10 100	635655
T10× 60		2.72	3.0	10 100	635656
T15× 60		3.26	4.0	10 100	635657
T20× 60		3.84	—	10 100	635658
T25× 60		4.4	—	10 100	635659

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.

**No. N TORX Bit**

- For fastening small screws for HDDs, etc.
- Bit tip high-precision-machined to thread standards.




Model No. (mm)	mm	d1	L1	d2	Inner Ctn.	EDP No.
T5 × 75		1.37	1.67	6.5	4.0	10 635498
100		1.37	1.67	6.5	4.0	10 635499
T6 × 75		1.65	1.95	6.5	4.0	10 635500
100		1.65	1.95	6.5	4.0	10 635501
T8 × 75		2.3	2.60	7.0	4.5	10 635505
100		2.3	2.60	7.0	4.5	10 635506
T10× 75		2.72	3.02	7.5	4.5	10 635510
100		2.72	3.02	7.5	4.5	10 635511
T15× 75		3.26	3.56	7.5	4.5	10 635515
100		3.26	3.56	7.5	4.5	10 635516
T20× 75		3.84	4.14	7.5	5.0	10 635520
100		3.84	4.14	7.5	5.0	10 635521
T25× 75		4.4	4.70	8.0	5.0	10 635525
100		4.4	4.70	8.0	5.0	10 635526
T27× 75		4.96	5.26	8.0	5.5	10 635530
100		4.96	5.26	8.0	5.5	10 635531

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.

**No. N TORX Bit (Tamper-Proof)**

- For fastening small screws for HDDs, etc.
- Bit tip high-precision-machined to thread standards.
- With a round hole for tamper-proof.



Model No. (mm)	mm	d1	L1	d2	Inner Ctn.	EDP No.
T10Hx 75		2.72	3.02	7.5	4.5	10 635551
100		2.72	3.02	7.5	4.5	10 635552
T15Hx 75		3.26	3.56	7.5	4.5	10 635553
100		3.26	3.56	7.5	4.5	10 635554
T20Hx 75		3.84	4.14	7.5	5.0	10 635555
100		3.84	4.14	7.5	5.0	10 635556
T25Hx 75		4.4	4.70	8.0	5.0	10 635557
100		4.4	4.70	8.0	5.0	10 635558


TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.



H 5 mm

**No. B34 Bit**


- For fastening various small screws and tapping screws for sheet metals.
- Bit tip high-precision-machined to thread standards.

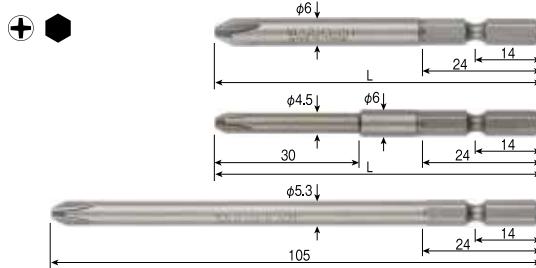

Size TipxOverall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 1 × 70	H	10	100	422031
100	H	10	100	422032
150	H	10	100	422033
⊕ 1×4 × 70	H	10	100	422048
⊕ 1×4×30×70	H	10	100	446335
⊕ 1×5.3×105	H	10	100	422034
★ 120	X	10	100	422040
120	H	10	100	422035
⊕ 2 × 70	H	10	100	422041
100	H	10	100	422042
120	H	10	100	422045
150	H	10	100	422043
200	H	10	100	422044
⊕ 2×3×30×75	H	10	100	446340
⊕ 2×4.5× 70	H	10	100	422049
⊕ 2×5.3×105	H	10	100	422046
120	H	10	100	422047
H 2 × 70	H	10	100	422071
H 2.5× 70	H	10	100	422072
H 3 × 70	H	10	100	422073
H 4 × 70	H	10	100	422074
H 5 × 70	H	10	100	422075

**No. B44 Socket bit**

- For fastening screws for electric appliances and hex head tapping screws.

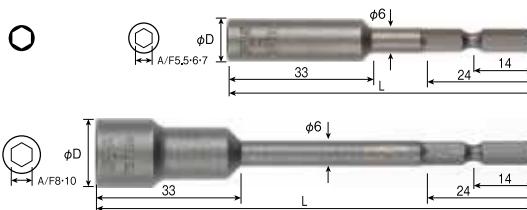


Size TipxOverall Length (mm)	φD	Hole depth (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 5.5× 70	9	25	10	250	422371
100	9	25	10	250	422381
6× 70	10	25	10	200	422372
100	10	25	10	200	422382
7× 70	11	25	10	200	422373
100	11	25	10	150	422383
8× 70	13	25	10	200	422374
100	13	25	10	150	422384
10×100	16	25	10	100	422385

**M4/M5/M6**

Other bits for screw fastening robots than the following can be custom-made.  
Please contact VESSEL with detailed information, listed in the right "One point" column.

**No. 3491/34,3492/34 Screw Shank Driver Bit**

Model No.	Size TipxOverall Length (mm)	M	Inner Ctn.	Outer Ctn.	EDP No.
3491/34	⊕1× 34-M4	M4	10	100	489656
3492/34	⊕2× 34-M4	M4	10	100	489657

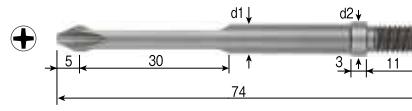**No. D61 Bits for screw fastening robots (Semi-standardized items)**

Model No. (mm)	d1	d2	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2×74-M5 P0.8	5.0	6.0	10	100	483301
⊕ 2×74-M6 P1.0	6.0	7.0	10	100	483302

**No. D62 Bits for screw fastening robots (Semi-standardized items)**

Model No. (mm)	d1	d2	Inner Ctn.	Outer Ctn.	EDP No.
⊕ 2×100-M6 P1.0	6.0	—	10	100	483303

# One point


## Custom-Made Bits

If you cannot find an appropriate bit among our standard line-up, VESSEL can also produce specially designed bits for your application.



### Bits for automated assembly lines

High-precision processing is required for bits to be installed in automatic assembly machines, which operate in micro-level accuracy. VESSEL has technology and know-how for such precision bits as one of the biggest bit manufacturers in the world.

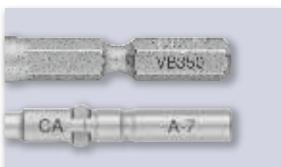

### Order-made bit database

All the previous orders are recorded and organized by computer system.



### Laser marking

Necessary information can be directly laser-marked on bits, which brings further efficiency to your inventory management.

### Innovative material and surface treatment

We choose most suitable materials and surface treatment methods for each different application, for example, high-endurance bits made of corrosion-resistant stainless steel and high-speed steel, etc.

### How to request for customized bits for automated machinery

Type of screw drive	
Type and size of screw drive	
A × B	M mm
mm	mm
mm	mm
Hardness	
Tolerance	To be specified/ To be based on VESSEL standards
Surface treatment	Black oxide finish Shot blasting
Sample screw	
Official drawing	Available/ Not available
Available/ Not available	
Quantity	

### Outline for made-to-order bit

**Arrangement** We receive a minimum order of 10 pieces including test samples. Since the more the number of bits ordered, the less the unit cost becomes, we recommend you to make a bulk purchase for production.

**Delivery deadline** Normally, we ship products within 21 work days after receiving your order. Regarding bits for Torx and automatic machine (screw thread cutting), we try to ship products within 25 work days after receiving your order.

\*For some types of bits, more time may be needed to machine specific dies and jigs.  
\*For delivery deadline, we will inform you each time.

### ● H 6.35 mm

#### No. HA Bit Holder

- Holds a bit with C-pin.
- Cutting chips do not attach to the bit.



Size Tip×Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F6.35× 75	—	10 100	482410

### No. HAM Bit Holder

- Holds the bit with a strong magnetic force.




Size Tip×Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F6.35× 75	—	10 100	482415

### ● H 6.35 mm

#### No. HB Bit Holder

- Holds a bit with C-pin.
- Cutting chips do not attach to the bit.



Size Tip×Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F6.35× 75	—	10 100	482420

### No. HBM Bit Holder

- Holds the bit with a strong magnetic force.



Size Tip×Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
A/F6.35× 75	—	10 100	482425

**No. DBH-01 Bit Holder**

● Holds a bit with C-pin.



Size Tip×Overall Length	Inner Ctn.	EDP No.
* A/F6.35×60	—	482431
* A/F6.35×102(BH44)	10	487366

**No. BH423M Bit Holder**

Size Tip×Overall Length	Inner Ctn.	EDP No.
A/F6.35×75	—	487370

**No. DBHM-01 Double Bit Holder**

● Popular bit holders.



Size Tip×Overall Length	Inner Ctn.	EDP No.
A/F6.35×60	—	482433

**No. HD-71×45 Bit Holder**

● By attaching a crescentic shank shape precision bit, it can be used with compact electric screwdrivers.



Size Overall Length (mm)	Inner Ctn.	Outer Ctn.	EDP No.
45	—	100	482429

※ Bit is not included.

# One point

Precision bits can be installed to electric screwdrivers.

D71/D72(4mm) bits can be inserted.

## No. HD-71×45



**No. MMBC-J Magnet Screw Catcher**

● Micro magnet screw catchers.



Size Tip×Overall Length (mm)	Tip size	L	Inner Ctn.	EDP No.
<b>T10× 49</b>	T10	49	10	447111
<b>70</b>	T10	70	10	447112
<b>T15× 49</b>	T15	49	10	447115
<b>70</b>	T15	70	10	447116
<b>T20× 49</b>	T20	49	10	447113
<b>75</b>	T20	75	10	447101
<b>150</b>	T20	150	10	447109
<b>T25× 49</b>	T25	49	10	447117
<b>70</b>	T25	70	10	447118

**H 6.35 mm****No. MMBC Magnet Screw Catcher**

● Micro magnet screw catchers.




Size Tip×Overall Length (mm)	Tip size	L	Inner Ctn.	EDP No.
<b>T10× 33</b>	T10	33	10	447104
<b>T15× 33</b>	T15	33	10	447102
<b>T20× 33</b>	T20	33	10	447103
<b>T25× 33</b>	T25	33	10	447110
<b>PH1× 33</b>	PH1	33	10	447105
<b>PH2× 33</b>	PH2	33	10	447106
<b>PZ1× 33</b>	PZ1	33	10	447107
<b>PZ2× 33</b>	PZ2	33	10	447108

**Replacement Bits For MMBC Series**


Size Tip×Overall Length (mm)		Inner Ctn.	EDP No.
<b>PH1× 33</b>	bit only, for MMBC	10	447333
<b>PH2× 33</b>	bit only, for MMBC	10	447334
<b>PZ1× 33</b>	bit only, for MMBC	10	447335
<b>PZ2× 33</b>	bit only, for MMBC	10	447336
<b>T10× 33</b>	bit only, for MMBC	10	447329
<b>T10× 49</b>	bit only, for MMBC-J	10	447337
<b>T10× 70</b>	bit only, for MMBC-J	10	447338
<b>T15× 33</b>	bit only, for MMBC	10	447330
<b>T15× 49</b>	bit only, for MMBC-J	10	447361
<b>T15× 70</b>	bit only, for MMBC-J	10	447362
<b>T20× 33</b>	bit only, for MMBC	10	447331
<b>T20× 49</b>	bit only, for MMBC-J	10	447339
<b>T20× 75</b>	bit only, for MMBC-J	10	447340
<b>T20×150</b>	bit only, for MMBC-J	10	447341
<b>T25× 33</b>	bit only, for MMBC	10	447332

**One point****Features of TORX Bits****TORX®**

TORX has 6-lobe shaped curves. Compared to hexagonal shape driver, TORX has higher drive effectiveness and transfers torque smoothly and accurately while eliminating "CAM-OUT".

**TORX**

TORX transfers max torque due to small driving angle.

**Hex**

Meanwhile, Hex square drive need max upload torque to transfer for large diving angle to other directions.

**TAMPER-PROOF TORX SYSTEM**


Added function of "Never Touch Screw" a post in the middle of the recess for maximum security eliminates regular TORX drive or any other flat screwdrivers for safety. Tamper proof screws are mostly used at communication equipment and computers so as not to abuse the screwing/unscrewing due to its design and control of function. Keep off unscrewing unless otherwise maintenance serving practiced.

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.



### No. B33 Short Bit (For Bit Holder)

● Can be used by attaching to a bit holder.

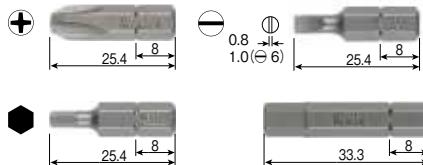


Model No. (mm)	Heat treatment classification	Tip	L (mm)	Inner Ctn.	Outer Ctn.	EDP No.
⊕1 × 25.4	H	⊕1	25.4	10	100	421231
⊕2 × 25.4	H	⊕2	25.4	10	100	421241
⊕3 × 25.4	G	⊕3	25.4	10	100	421242
⊕4 × 25.4	G	⊕4	25.4	10	100	421251
⊕6 × 25.4	G	⊕6	25.4	10	100	421252
H2 × 25.4	H	H2	25.4	10	100	421260
H2.5×25.4	H	H2.5	25.4	10	100	421261
H3 × 25.4	H	H3	25.4	10	100	421262
H4 × 33.3	H	H4	33.3	10	100	421263
H5 × 33.3	H	H5	33.3	10	100	421264
H6 × 33.3	H	H6	33.3	10	100	421265

Model No.	Contents	Set content	Inner Ctn.	Outer Ctn.	EDP No.
B33 Driver Bit Set	1 for each	⊕1, ⊕2, ⊕3, ⊕4, ⊕6×25.4 with holder	1	10	421270
B33 Hex. Bit Set	1 for each	H 2, 2.5, 3×25.4 H 4, 5, 6×33.3 with holder	1	10	421271

### No. B33 Short Bit (For Bit Holder)

● Can be used by attaching to a bit holder.

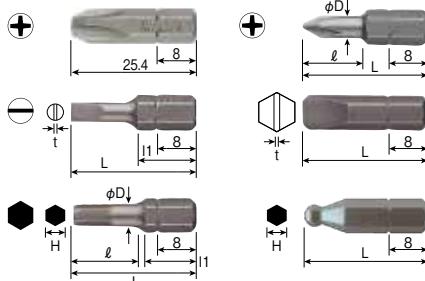

Model No. (mm)	Heat treatment classification	Tip	ϕD	l	l1	L (mm)	Outer Ctn.	EDP No.
★ 1001	H	⊕1	—	—	—	25.4	10	487105
★ 3002R/25	H	⊕2	6	12	—	25	10	489003
★ 1002	H	⊕2	—	—	—	25.4	10	487106
★ 1002X	X	⊕2	—	—	—	25.4	10	487502
★ 5603/25	H	⊖3 × 0.5t	—	—	11	25	10	489061
★ 5635/25	H	⊖3.5 × 0.55t	—	—	11	25	10	489678
★ 1501	H	⊖4.76 × 0.86t	—	—	—	25.4	10	487120
★ 1502	H	⊖5.56 × 1.02t	—	—	—	25.4	10	487121
★ 1503	H	⊖6.35 × 1.07t	—	—	—	25.4	10	487122
★ 1504	H	⊖7.14 × 1.17t	—	—	—	25.4	10	487123
★ 1505	H	⊖8 × 1.27t	—	—	—	25.4	10	487124
★ 30325/25	H	H2.5	3	4.5	11	25	10	489052
★ 21005	H	H5	—	12.7	18	33.3	10	487143
★ 3034/25	H	H4	4.75	6	11	25	10	489054
★ 3036/25	H	H6	—	8	—	25	10	489056
★ 3038/25	H	H8	—	10	—	25	10	489057
★ 3760/25	H	BP H6	—	—	—	25	10	446407

### No. B33 3-Flute Bit (For Bit Holder)


● Can be used by attaching to a bit holder.



Model No. (mm)	Heat treatment classification	Tip	L (mm)	Inner Ctn.	EDP No.
* 4002	H	TW2	25.4	10	446412
* 4004	H	TW4	25.4	10	446414

### No. B33 Square Bits (For Bit Holder)

● Can be used by attaching to a bit holder.



Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	EDP No.
SQ1×25.4 (3001)	H	10	487150



### No. B33 Hex Bit (For Bit Holder)

● Can be used by attaching to a bit holder.



Model No. (mm)	Heat treatment classification	Tip	l	L (mm)	Inner Ctn.	EDP No.
* 3048/34	H	H8	16	34	10	489105
* 3050/34	H	H10	16	34	10	489106

**No. A4 TORX Bit**

● Can be used by attaching to a bit holder.



Size Tip No.	mm	Overall Length (mm)	Inner Ctn.	EDP No.
<b>T6</b>	1.65	25.4	10	635400
<b>T8</b>	2.3	25.4	10	635401
<b>T10</b>	2.72	25.4	10	635402
<b>T15</b>	3.26	25.4	10	635403
<b>T20</b>	3.84	25.4	10	635404
<b>T25</b>	4.4	25.4	10	635405
<b>T27</b>	4.96	25.4	10	635406
<b>T30</b>	5.49	25.4	10	635407
<b>T40</b>	6.6	25.4	10	635408

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.



Model No.	Size	mm	Overall Length (mm)	Inner Ctn.	EDP No.
<b>T3/25</b>	T3	1.12	25	10	489154
<b>T5/25</b>	T5	1.37	25	10	489155
<b>T7/25</b>	T7	1.99	25	10	489157
<b>T27/25</b>	T27	4.96	25	10	489164
★ <b>TF08/25</b>	T8H	2.31	25	10	446392
★ <b>TF09/25</b>	T9H	2.5	25	10	446393
★ <b>TF15/25</b>	T15H	3.26	25	10	489168
★ <b>TF25/25</b>	T25H	4.43	25	10	489170
★ <b>TF27/25</b>	T27H	4.96	25	10	489171
★ <b>TF30/25</b>	T30H	5.49	25	10	489172

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

**No. IP TORX Plus Bit**


● Can be used by attaching to a bit holder.



Size Tip No.	mm	Overall Length (mm)	Inner Ctn.	EDP No.
<b>15IP</b>	3.26	25	10	447204
<b>20IP</b>	3.84	25	10	447205
<b>25IP</b>	4.4	25	10	447206
<b>30IP</b>	5.49	25	10	447207
<b>40IP</b>	6.6	25	10	447208


TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

H 6.35 mm

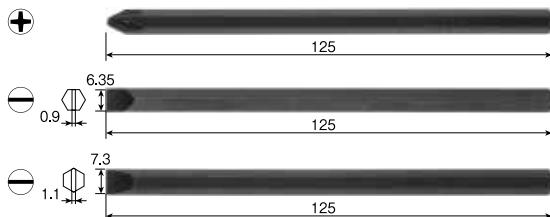**No. C50 Impact Driver Bit**


Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	EDP No.
<b>⊕ 1× 125</b>	G	10	431301
<b>⊕ 2× 125</b>	G	10	431302
<b>⊕ 3× 125</b>	G	10	431303
<b>⊖ 5× 125</b>	G	10	431311
<b>⊖ 6× 125</b>	G	10	431312
<b>⊖ 7× 125</b>	G	10	431313

Applicable models




Model No.	Contents	Set content	Inner Ctn.	EDP No.
<b>2300• 2600A Bit Set</b>	1 for each	C50 ⊕1, ⊕2, ⊕3, ⊖5, ⊖6, ⊖7×125mm	1	431701

H 8 mm

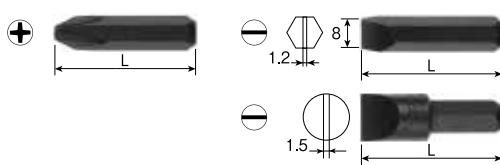**No. C51 Impact Driver Bit**

Size Tip×Overall Length (mm)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
<b>⊕ 2× 36</b>	G	10	250	431041
<b>80</b>	G	10	250	431042
<b>⊕ 3× 36</b>	E	10	250	431051
<b>80</b>	E	10	250	431052
<b>⊕ 4× 36</b>	E	10	250	431061
<b>⊖ 8× 36</b>	E	10	250	431171
<b>80</b>	E	10	250	431172
<b>⊖10× 36</b>	E	10	250	431271
<b>80</b>	E	10	200	431272
<b>⊖12× 36</b>	E	10	200	431273

Applicable models



Model No.	Contents	Set content	Inner Ctn.	Outer Ctn.	EDP No.
<b>2500 Bit Set</b>	1 for each	C51 ⊕2, ⊕3, ⊕4, ⊖10×36mm	1	50	431801

## ■ 9.5 mm Attachment for Impact Driver

### No. S6 TORX Socket

●SQ9.5mm TORX sockets for impact wrenches




Size Tip×Overall Length (mm)	mm	d1 (mm)	EDP No.		
T30× 75	▲	5.49	5.79	—	635681
T40× 75	▲	6.6	6.9	—	635682
T45× 75	▲	7.77	8.0	—	635683
T50× 75	▲	8.79	10.0	—	635684

▲For the date of delivery, consult Vessel.  
TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

## ■ 12.7 mm Attachment for Impact Driver

### No. S8 TORX Socket

●SQ12.7mm TORX sockets for impact wrenches.

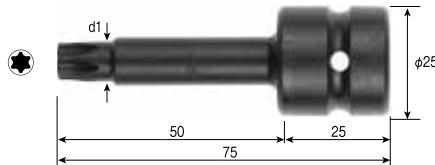


Size Tip×Overall Length (mm)	mm	d1 (mm)	EDP No.		
T40× 75	▲	6.6	6.9	—	635691
T45× 75	▲	7.77	8.0	—	635692
T50× 75	▲	8.79	9.09	—	635693

▲For the date of delivery, consult Vessel.  
TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).  
VESSEL has a manufacturing license in Japan and selling same to the world.

### No. BTX Blades for Torque Screwdrivers

●Blades for TORX screws.

●Adopted for replacement of chips of machine tools that has been going up in speed.

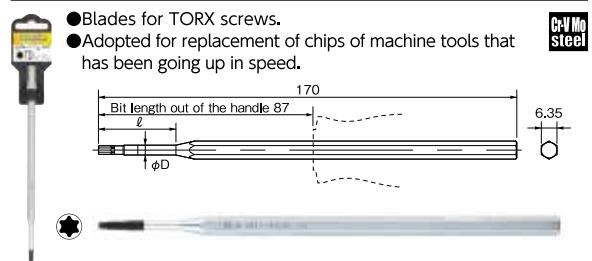

Model No.	Tip	mm	l (mm)	φD (mm)	Outer Ctn.	EDP No.
BTX06	T6	1.69	30	3.5	10	173206
BTX07	T7	1.97	30	3.5	10	173207
BTX08	T8	2.3	30	3.5	10	173208
BTX10	T10	2.72	30	3.5	10	173210
BTX15	T15	3.26	32	4.5	10	173215
BTX20	T20	3.84	34	5	10	173220

### No. B\_IP Blades for Torque Screwdrivers

●Blades for TORX PLUS screws.

●Adopted for replacement of chips of machine tools that has been going up in speed.

Model No.	Tip	mm	l (mm)	φD (mm)	Outer Ctn.	EDP No.
B06IP	6IP	1.69	30	3.5	10	173106
B07IP	7IP	1.97	30	3.5	10	173107
B08IP	8IP	2.29	30	3.5	10	173108
B09IP	9IP	2.48	30	3.5	10	173109
B10IP	10IP	2.72	30	3.5	10	173110
B15IP	15IP	3.25	30	4.5	10	173111

### No. BPH Blades for Torque Screwdrivers

●Blades for Phillips screws.

●Optimal for tightening control of various terminal blocks.

Model No.	Tip	l (mm)	φD (mm)	Outer Ctn.	EDP No.
BPH01	⊕1	35	5	10	173301
BPH02	⊕2	35	6	10	173302
BPH03	⊕3	—	—	10	173303

### No. BHX Blades for Torque Screwdrivers

●Blades for hexagonal socket head bolts and set screw.

●Optimum for assembly of machines or automatic equipment.

Model No.	Tip	mm	l (mm)	φD (mm)	Outer Ctn.	EDP No.
BHX15	H1.5	1.5	29.5	3	10	173321
BHX20	H2	2	29.5	3	10	173322
BHX25	H2.5	2.5	29.5	3	10	173323
BHX30	H3	3	32	4	10	173324
BHX40	H4	4	34	5	10	173325
BHX50	H5	5	36	6	10	173326