



**Main Specification**

Engine	Type	: Two Stroke, Air Cooled
	Displacement	: 41.5cc
	Fuel Tank Capacity	: 1 liter
	Fuel Mixture Ratio	: 25-50:1 (Unleaded gasoline: 2 stroke engine oil)
	Revolution (idling)	: 2,500-3,000rpm
	Revolution (loaded, impact)	: 6,500-6,800rpm
	Revolution (non loaded, max)	: 9,800rpm
Ignition	Type	: CDI
	Spark Plug Type	: NGK PBMR8Y
Carburetor	Type	: Diaphragm
Impact	Square Driver Size	: 25.4mm (1")
	Fastening Torque Range	: 1,700N.m (Full Throttle)
		: 900N.m (Half Throttle)
	Free Speed	: 1,200 rpm
Capacity	Bolt Diameter	: 32mm(1 1/4")
Weight	Without fuel	: 19.8kg

**GT-3500GE-V-LV Low vibration model**

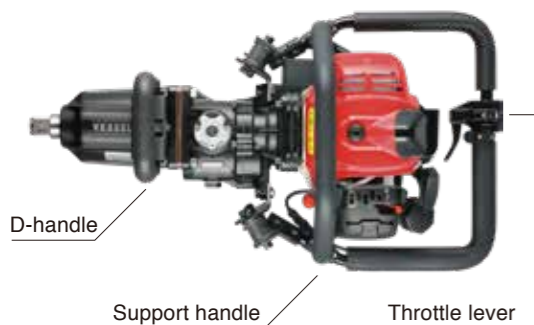

Size	W390 x L680 x H346 (mm)
Weight	21.6kg

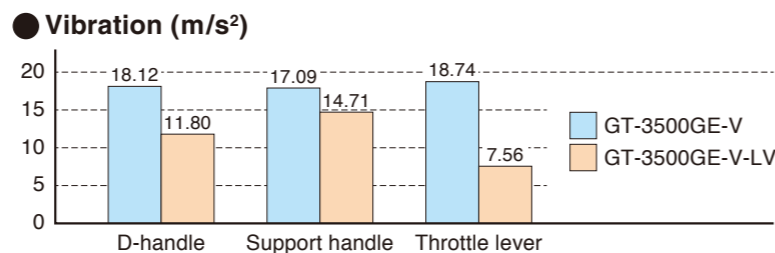

\* Details are described in separate instruction manuals.

**VESSEL Co., Inc.**

17-25, Fukae-Kita 2-chome, Higashinari-ku, Osaka 537-0001 JAPAN  
Tel: +81 (0)6 6976 7778 Fax: +81 (0)6 6972 9441  
E-mail: export@vessel.co.jp URL : www.vessel.co.jp/english/

**VESSEL EUROPE**

8, avenue Johannes Gutenberg 78310 Maurepas FRANCE  
Tel: +33(0)1 69 19 17 42 Fax: +33(0)1 69 19 42 20  
E-mail: contact@vessel-europe.com URL : www.vessel-europe.com

Distributed by

*New*

**GASOLINE ENGINE IMPACT WRENCH**

**Pick up and work alone!**

*Portable!*



**Model No. GT-3500GE-V**  
(EDP No.338601)

**EURO V EMISSION CONTROL APPROVED.**

<EU> 2016/1628, <EU>2018/987,  
<EU>2018/988, <EU>2018/989

**MADE IN JAPAN**

# PORTABLE GASOLINE ENGINE IMPACT WRENCH

*Going Everywhere, No Electricity, No Air Power, No Motor, etc.*

**1"Socket Square Drive**  
Powerful driving shaft 1"anvil!  
Applicable for bolts and nuts, rusted and frozen!

Support handle with rubber grip  
(Well balanced)

Gear Box

Main handle with rubber grip

**Model No.**  
**GT-3500GE-V**  
(EDP No.338601)

Lever support button

Torque adjustment button

Throttle lever



Recoil starter

Choke lever

Impact Mechanism

Reduction Gear Box

Stop switch

Centrifugal Clutch

Gasoline Engine

**1 GASOLINE ENGINE IMPACT WRENCH**

**2 Ideal for Remote Area**  
Due to self-powered wrench

**3 Emergency**

**4 Only 19.8kg!**  
Easy to carry it away.  
Max Torque Fastening



**Create The New Market!**